


Inter Decor

RENOVATION FURNITURE TRADING LLC

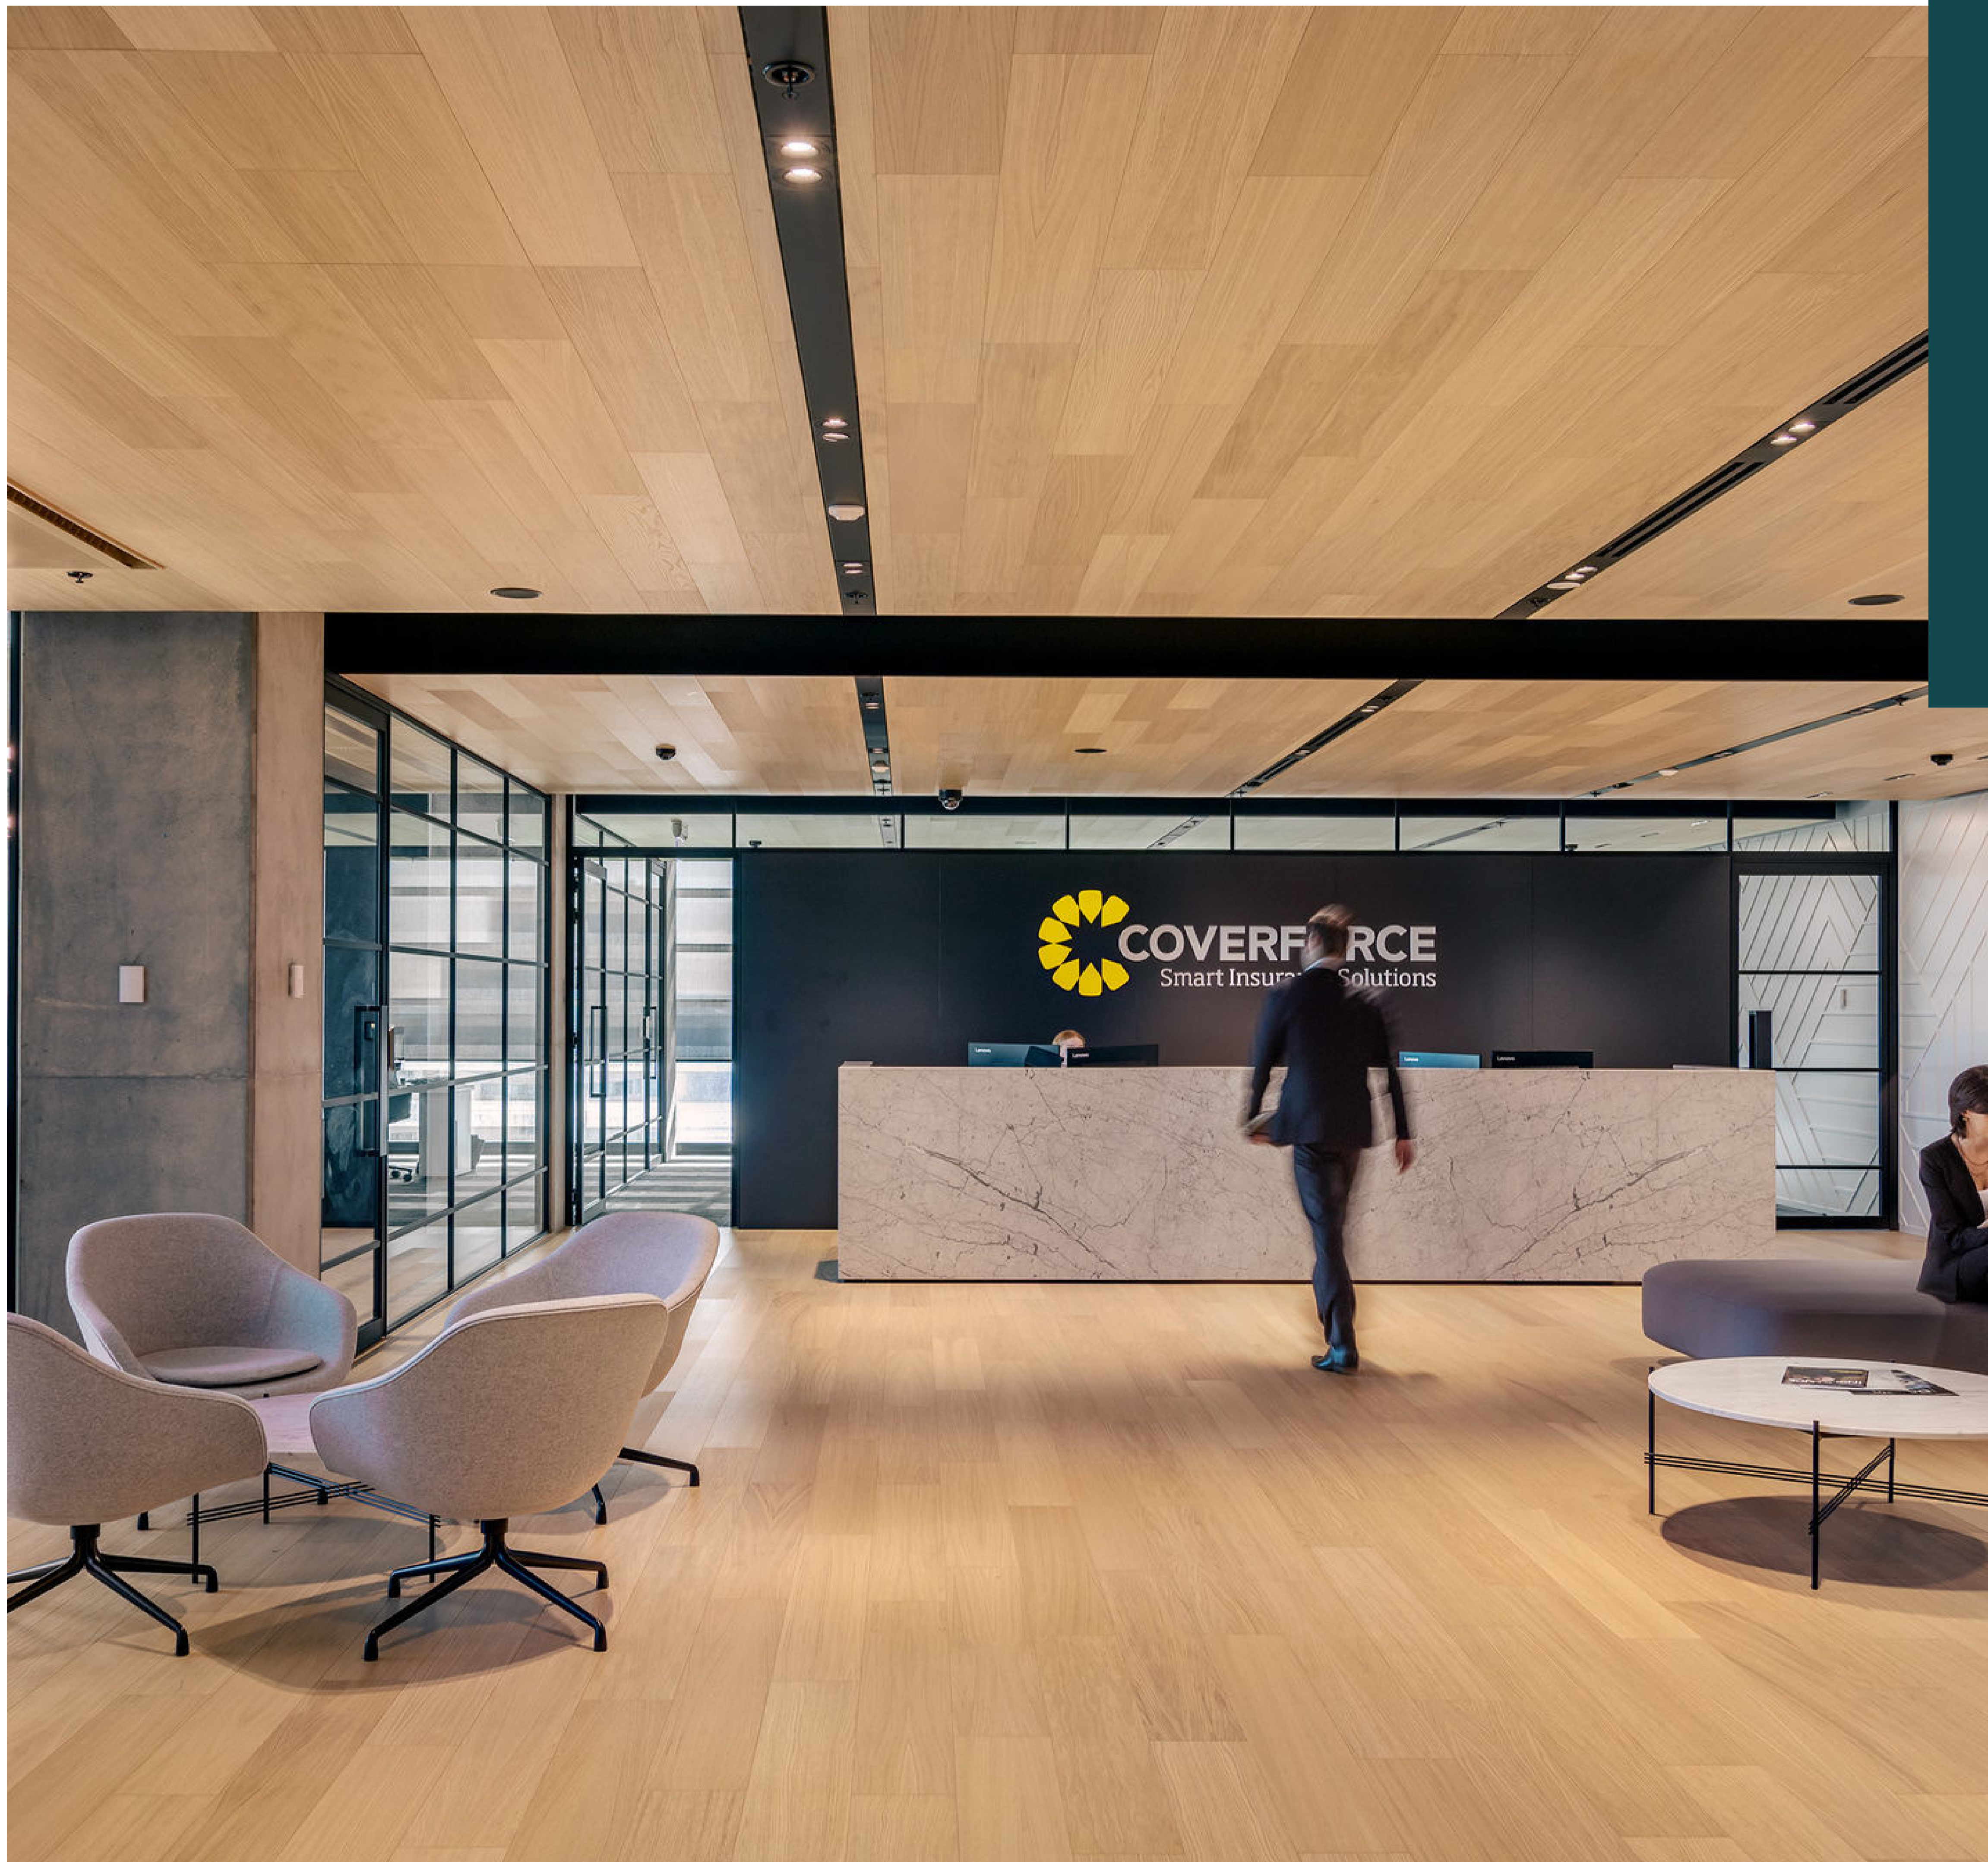

ENGINEERED TIMBER PARKY

MODERN, CLASSICAL & STYLISH
FLOOR, WALL & WINDOW TREATMENTS.



PARKY - DECOSPAN

Parky is a Decospan Group brand, a committed business for over three generations with an insatiable passion for wood. Decospan sees research & development as the key to future growth. Parky is a multi-layer parquet which combines the warmth and unique design of real wood with the technical advantages of rigid board engineered flooring.

PARKY PRO-06



Parky Pro-06

DESERT OAK - IN STOCK



Specifications

Top Layer:	0.6mm
Length:	1203mm
Width:	190mm
Thickness:	7.2mm
Core:	High Density Fibreboard (HDF)
Bevel:	4 Bevels (0.5mm)
Finish:	Super Matt
Commercial Class:	Class 31
Connection System:	Uniclic
Installation Type:	Floating
Fire Class:	Cfl-s1
CE Certification:	EN14342:2013

Parky Pro-06

ESSENCE OAK – IN STOCK



Specifications

Top Layer:	0.6mm
Length:	1203mm
Width:	190mm
Thickness:	7.2mm
Core:	High Density Fibreboard (HDF)
Bevel:	4 Bevels (0.5mm)
Finish:	Super Matt
Commercial Class:	Class 31
Connection System:	Uniclic
Installation Type:	Floating
Fire Class:	Cfl-s1
CE Certification:	EN14342:2013

Parky Pro-06

IVORY OAK – IN STOCK



Specifications

Top Layer:	0.6mm
Length:	1203mm
Width:	190mm
Thickness:	7.2mm
Core:	High Density Fibreboard (HDF)
Bevel:	4 Bevels (0.5mm)
Finish:	Super Matt
Commercial Class:	Class 31
Connection System:	Uniclic
Installation Type:	Floating
Fire Class:	Cfl-s1
CE Certification:	EN14342:2013

Parky Pro-06

MILK OAK – IN STOCK



Specifications

Top Layer:	0.6mm
Length:	1203mm
Width:	190mm
Thickness:	7.2mm
Core:	High Density Fibreboard (HDF)
Bevel:	4 Bevels (0.5mm)
Finish:	Super Matt
Commercial Class:	Class 31
Connection System:	Uniclic
Installation Type:	Floating
Fire Class:	Cfl-s1
CE Certification:	EN14342:2013

Parky Pro-06

SMOKED WALNUT- IN STOCK




Specifications

Top Layer:	0.6mm
Length:	1203mm
Width:	190mm
Thickness:	7.2mm
Core:	High Density Fibreboard (HDF)
Bevel:	4 Bevels (0.5mm)
Finish:	Super Matt
Commercial Class:	Class 31
Connection System:	Uniclic
Installation Type:	Floating
Fire Class:	Cfl-s1
CE Certification:	EN14342:2013

Parky Pro-06

CHOCOLATE OAK OAK – ON ORDER

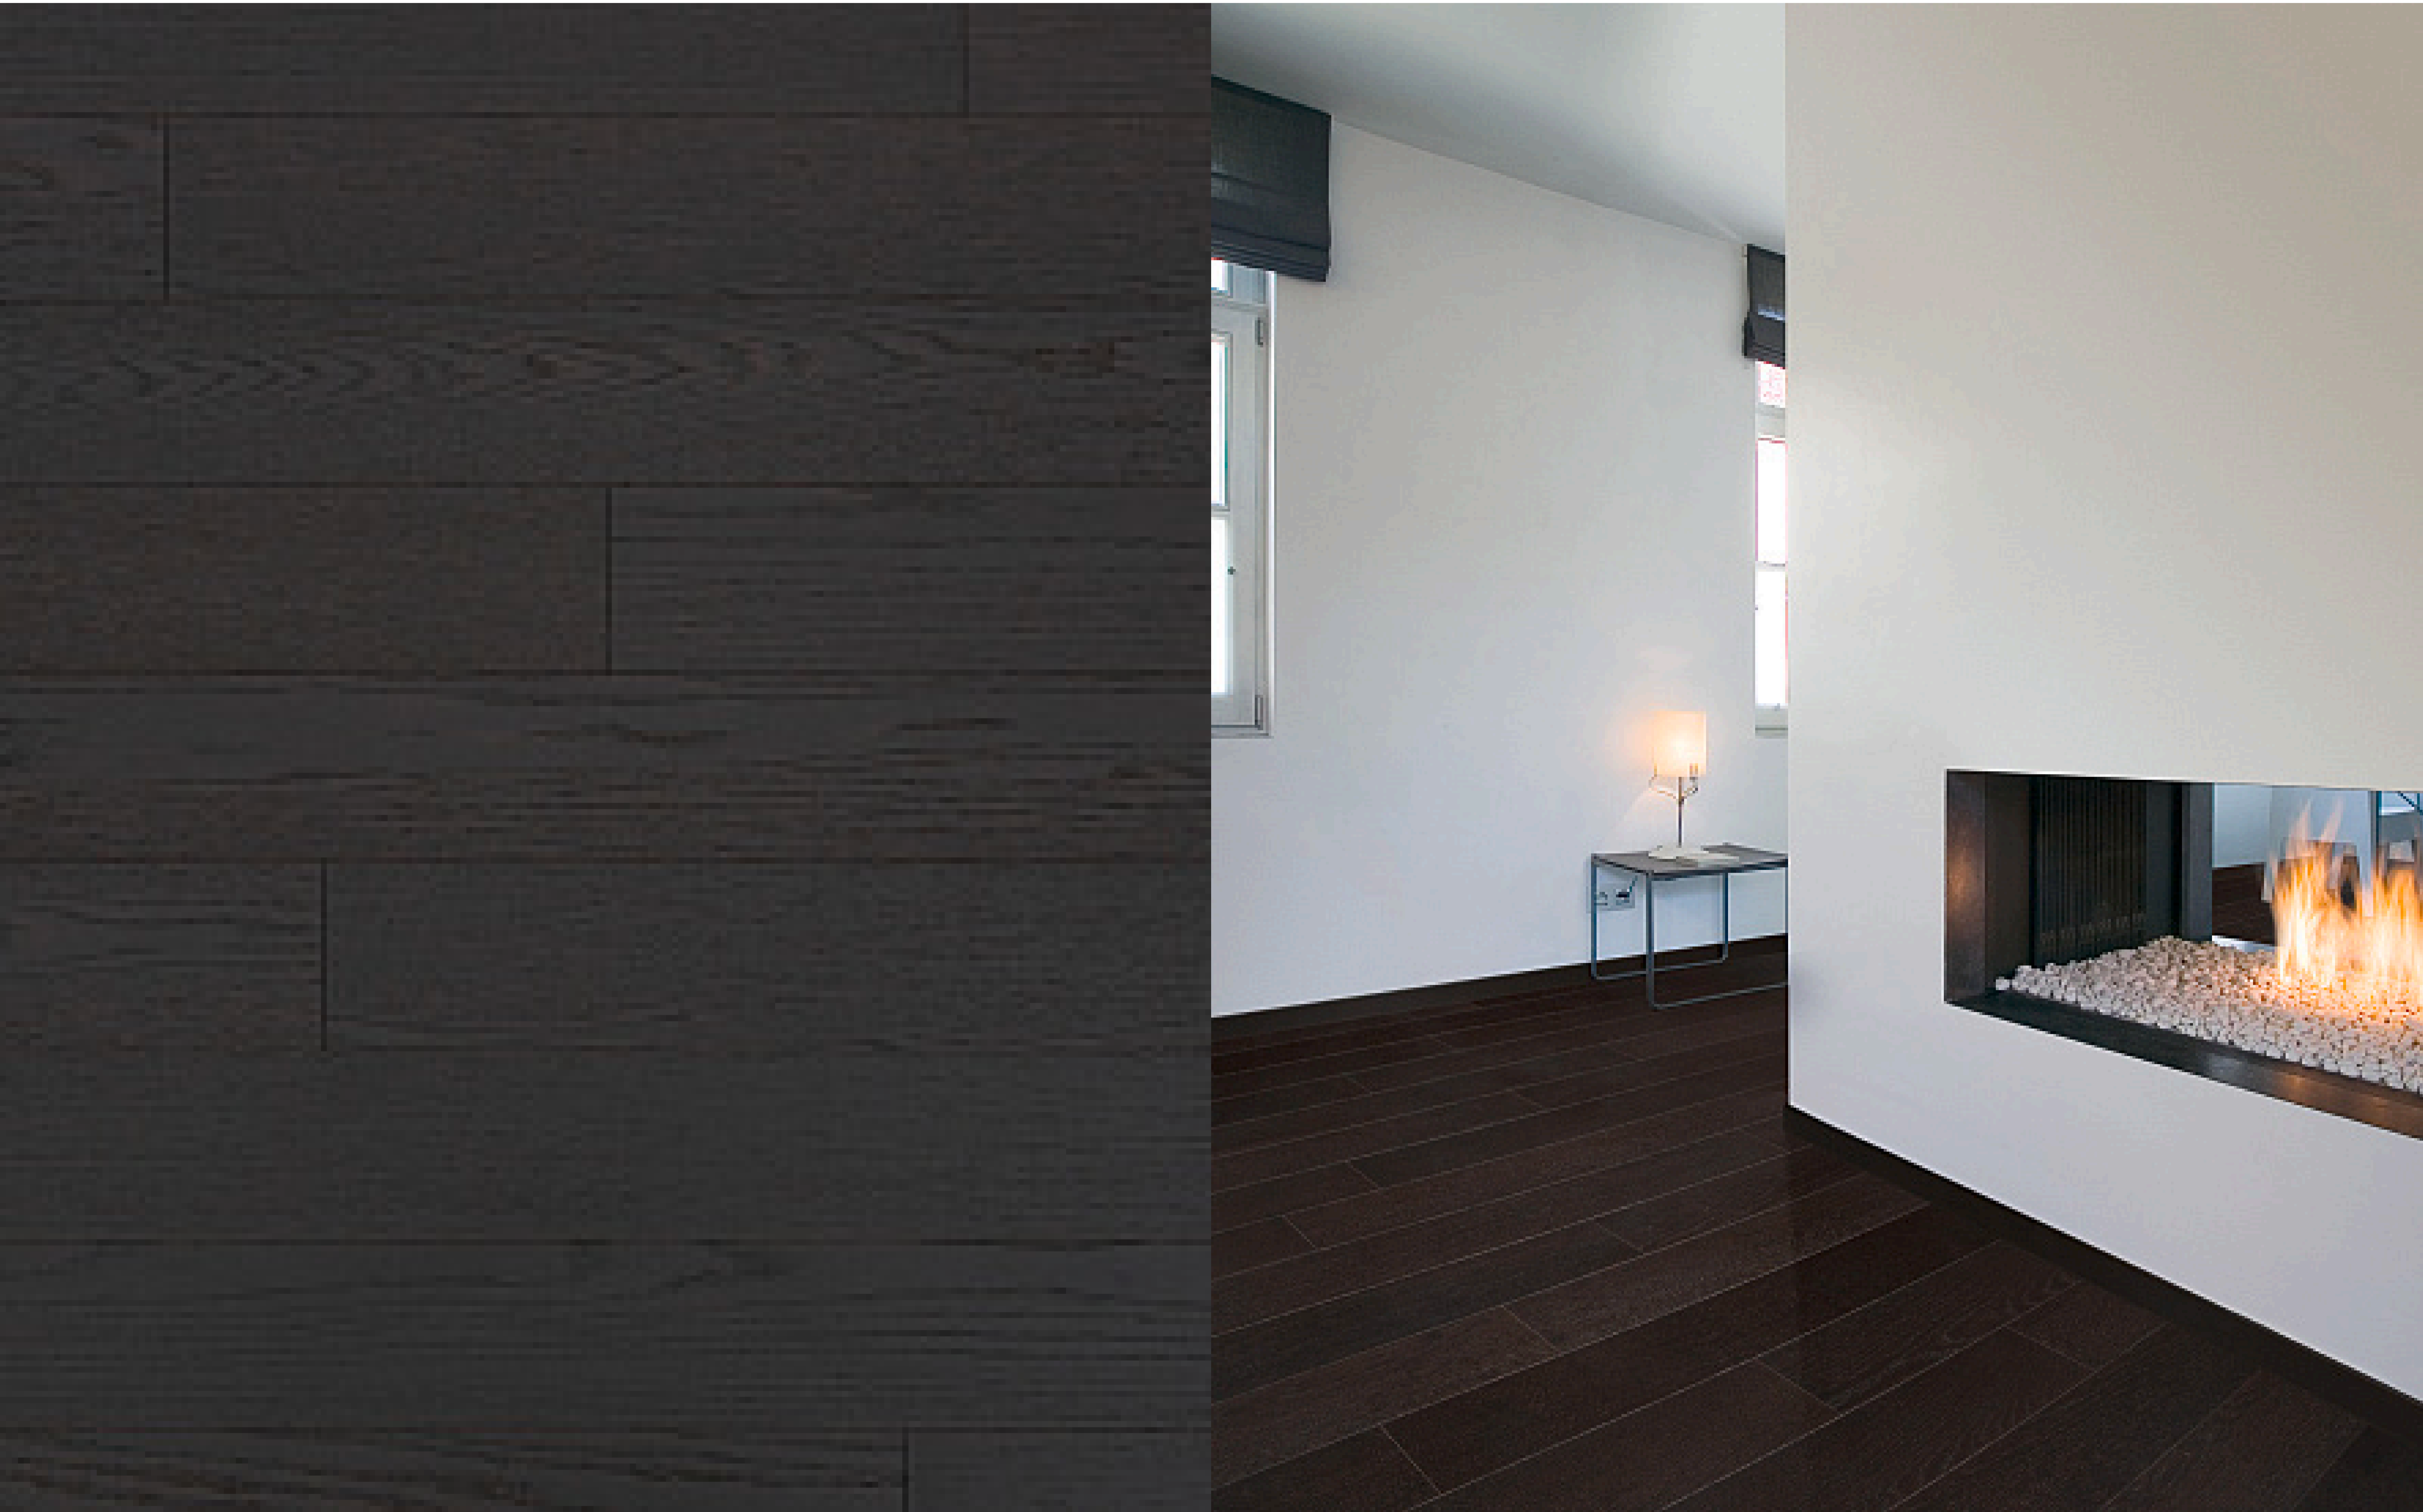

Specifications

Top Layer:	0.6mm
Length:	1203mm
Width:	190mm
Thickness:	7.2mm
Core:	High Density Fibreboard (HDF)
Bevel:	4 Bevels (0.5mm)
Finish:	Super Matt
Commercial Class:	Class 31
Connection System:	Uniclic
Installation Type:	Floating
Fire Class:	Cfl-s1
CE Certification:	EN14342:2013

Parky Pro-06

MANHATTAN OAK - ON ORDER



Specifications

Top Layer:	0.6mm
Length:	1203mm
Width:	190mm
Thickness:	7.2mm
Core:	High Density Fibreboard (HDF)
Bevel:	4 Bevels (0.5mm)
Finish:	Super Matt
Commercial Class:	Class 31
Connection System:	Uniclic
Installation Type:	Floating
Fire Class:	Cfl-s1
CE Certification:	EN14342:2013

Parky Pro-06

UMBER OAK – ON ORDER



Specifications

Top Layer:	0.6mm
Length:	1203mm
Width:	190mm
Thickness:	7.2mm
Core:	High Density Fibreboard (HDF)
Bevel:	4 Bevels (0.5mm)
Finish:	Super Matt
Commercial Class:	Class 31
Connection System:	Uniclic
Installation Type:	Floating
Fire Class:	Cfl-s1
CE Certification:	EN14342:2013

PARKY SWING



Parky Swing

DESERT OAK – ON ORDER



Specifications

Top Layer:	0.6mm
Length:	593mm
Width:	121mm
Thickness:	10mm
Core:	High Density Fibreboard (HDF)
Bevel:	4 Bevels (0.5mm)
Finish:	Super Matt
Commercial Class:	Class 31
Connection System:	Unifit X
Installation Type:	Floating
Fire Class:	Cfl-s1
CE Certification:	EN14342:2013

Parky Swing

EUROPEAN OAK – ON ORDER



Specifications

Top Layer:	0.6mm
Length:	593mm
Width:	121mm
Thickness:	10mm
Core:	High Density Fibreboard (HDF)
Bevel:	4 Bevels (0.5mm)
Finish:	Super Matt
Commercial Class:	Class 31
Connection System:	Unifit X
Installation Type:	Floating
Fire Class:	Cfl-s1
CE Certification:	EN14342:2013

Parky Swing


SMOKED WALNUT- ON ORDER



Specifications

Top Layer:	0.6mm
Length:	593mm
Width:	121mm
Thickness:	10mm
Core:	High Density Fibreboard (HDF)
Bevel:	4 Bevels (0.5mm)
Finish:	Super Matt
Commercial Class:	Class 31
Connection System:	Unifit X
Installation Type:	Floating
Fire Class:	Cfl-s1
CE Certification:	EN14342:2013

PARKY SUMMIT

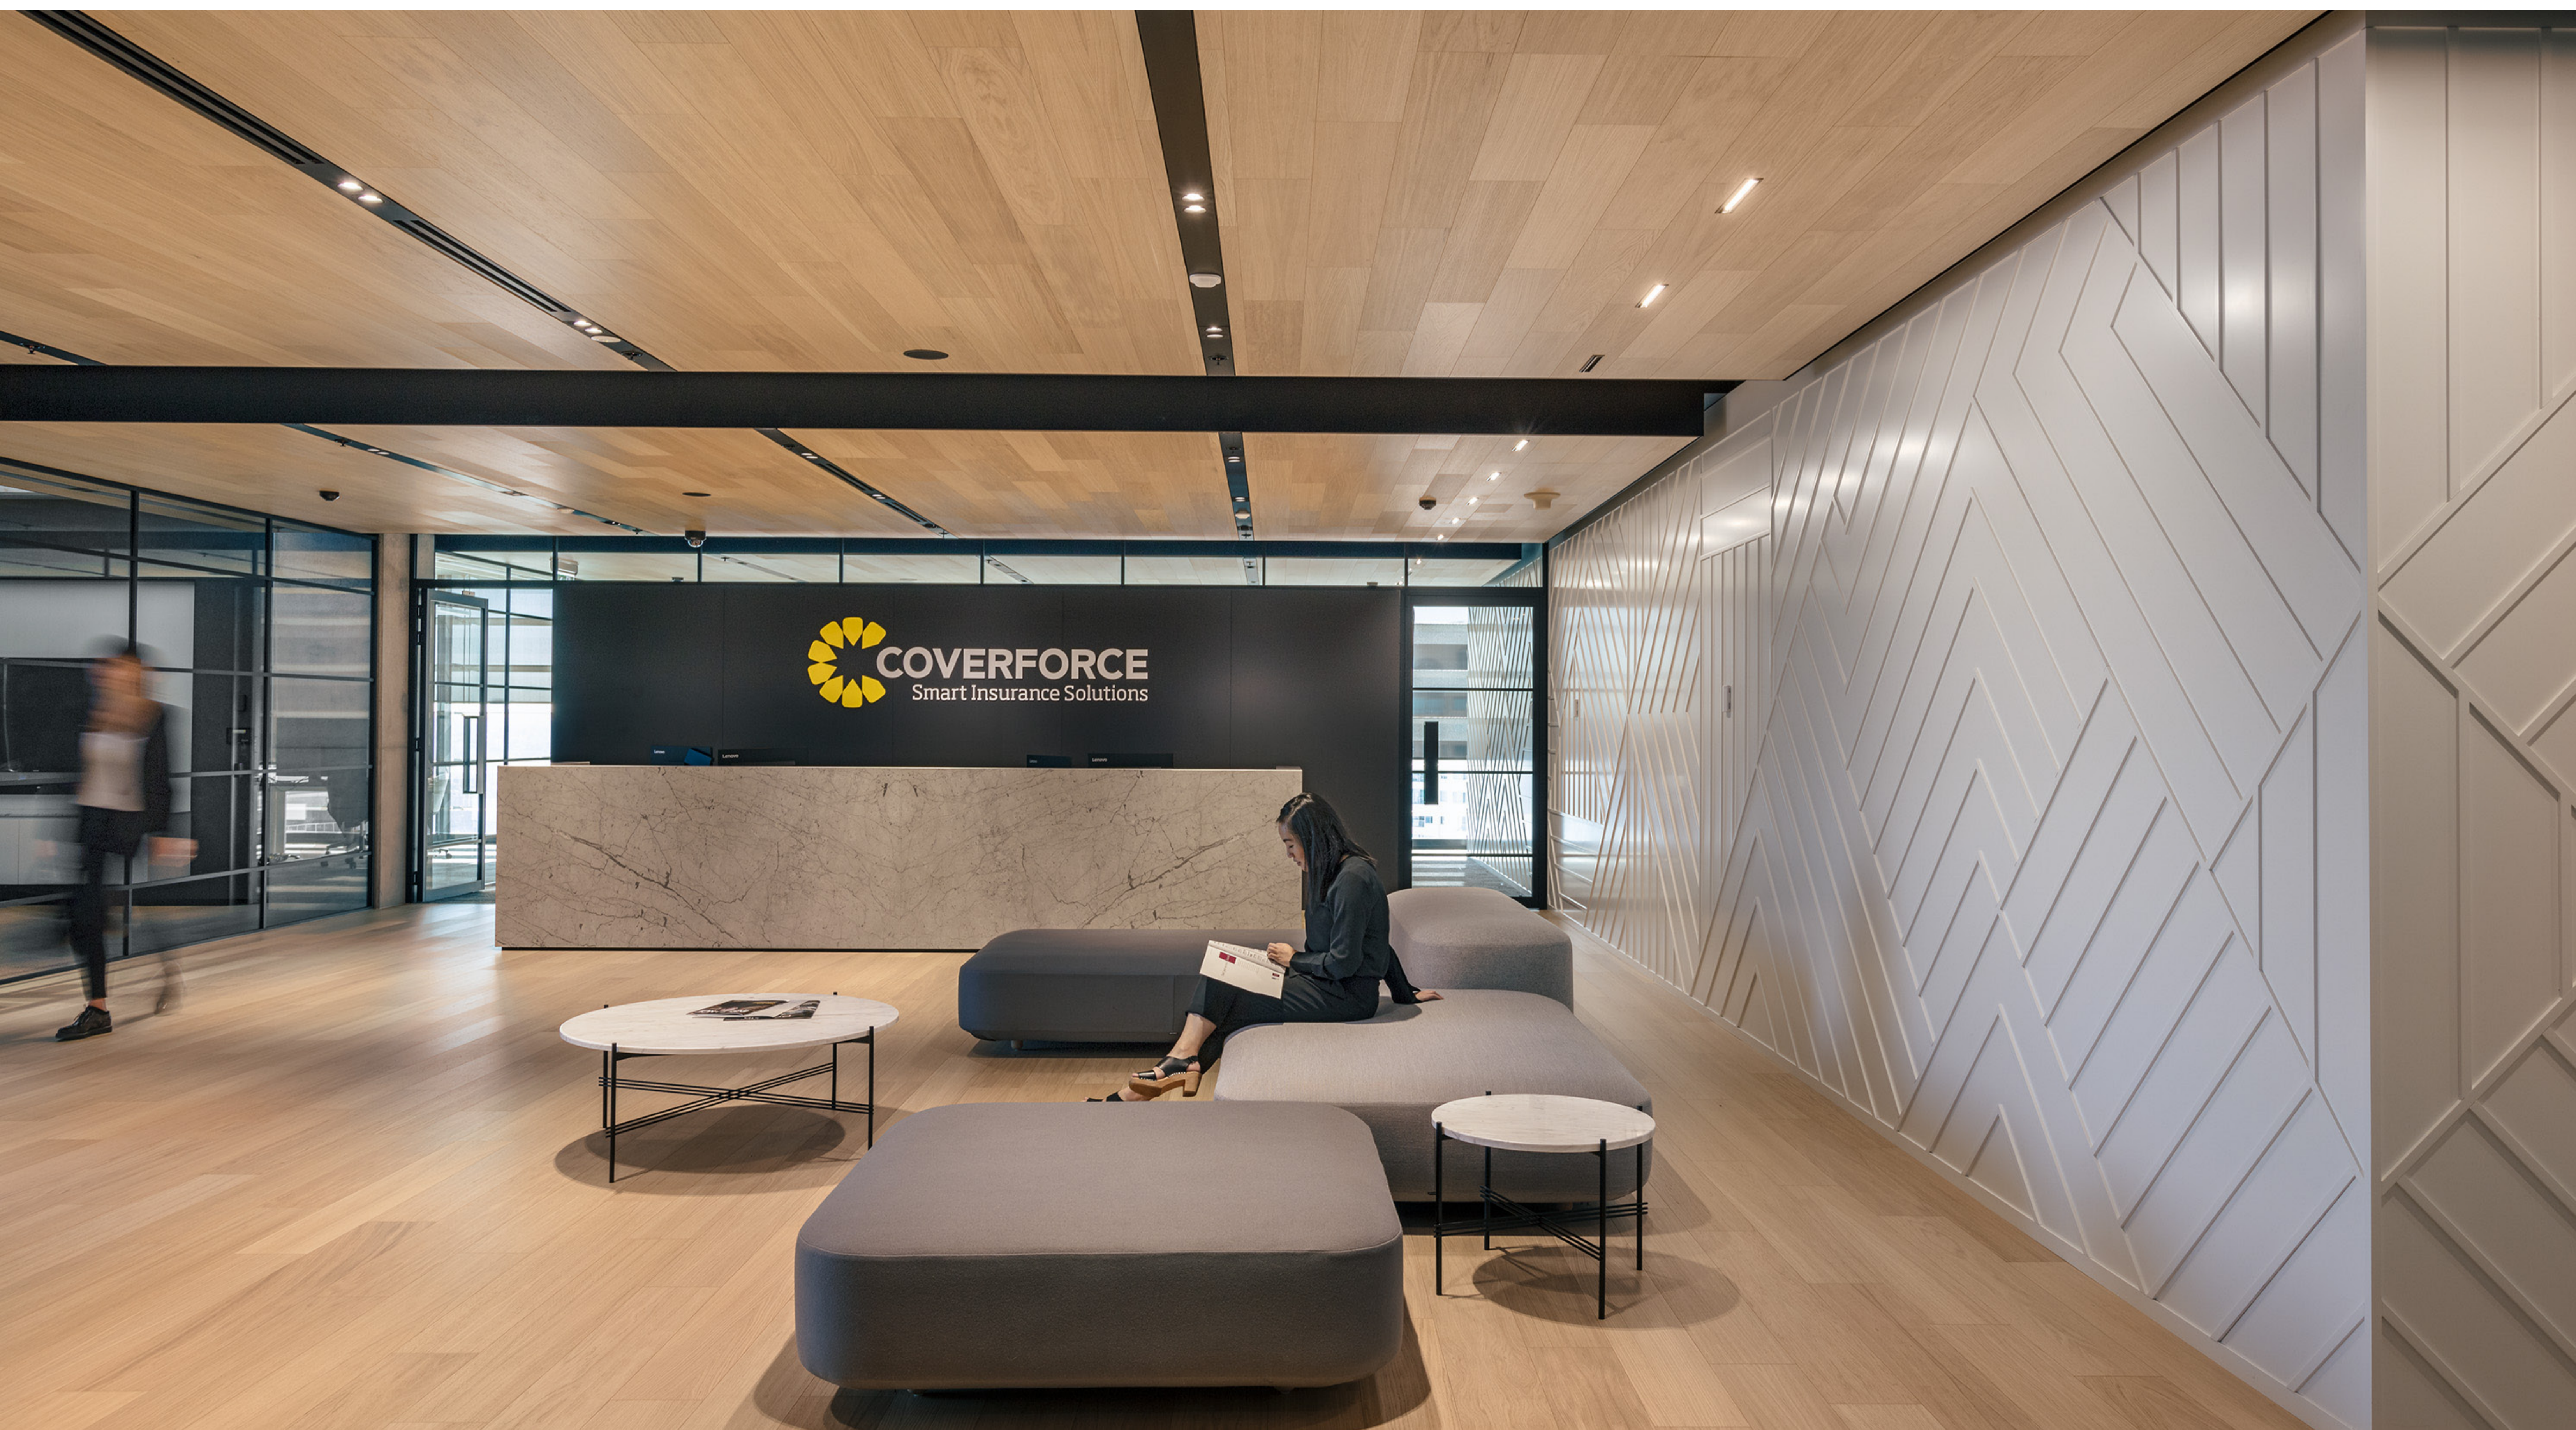

Parky Summit

DUNE OAK - ON ORDER



Specifications

Top Layer:	0.6mm
Length:	2050mm
Width:	233mm
Thickness:	10mm
Core:	High Density Fibreboard (HDF)
Bevel:	4 Bevels (0.5mm)
Finish:	Super Matt
Commercial Class:	Class 33
Connection System:	Unifit X
Installation Type:	Floating
Fire Class:	Cfl-s1
CE Certification:	EN14342:2013

Parky Summit

ESSENCE OAK – ON ORDER



Specifications

Top Layer:	0.6mm
Length:	2050mm
Width:	233mm
Thickness:	10mm
Core:	High Density Fibreboard (HDF)
Bevel:	4 Bevels (0.5mm)
Finish:	Super Matt
Commercial Class:	Class 33
Connection System:	Unifit X
Installation Type:	Floating
Fire Class:	Cfl-s1
CE Certification:	EN14342:2013

Parky Summit

FROZEN WALNUT- ON ORDER



Specifications

Top Layer:	0.6mm
Length:	2050mm
Width:	233mm
Thickness:	10mm
Core:	High Density Fibreboard (HDF)
Bevel:	4 Bevels (0.5mm)
Finish:	Super Matt
Commercial Class:	Class 33
Connection System:	Unifit X
Installation Type:	Floating
Fire Class:	Cfl-s1
CE Certification:	EN14342:2013

Parky Summit

MOUNTAIN OAK – ON ORDER



Specifications

Top Layer:	0.6mm
Length:	2050mm
Width:	233mm
Thickness:	10mm
Core:	High Density Fibreboard (HDF)
Bevel:	4 Bevels (0.5mm)
Finish:	Super Matt
Commercial Class:	Class 33
Connection System:	Unifit X
Installation Type:	Floating
Fire Class:	Cfl-s1
CE Certification:	EN14342:2013

Parky Summit

SILK OAK – ON ORDER



Specifications

Top Layer:	0.6mm
Length:	2050mm
Width:	233mm
Thickness:	10mm
Core:	High Density Fibreboard (HDF)
Bevel:	4 Bevels (0.5mm)
Finish:	Super Matt
Commercial Class:	Class 33
Connection System:	Unifit X
Installation Type:	Floating
Fire Class:	Cfl-s1
CE Certification:	EN14342:2013

Parky Summit

SKY OAK – ON ORDER



Specifications

Top Layer:	0.6mm
Length:	2050mm
Width:	233mm
Thickness:	10mm
Core:	High Density Fibreboard (HDF)
Bevel:	4 Bevels (0.5mm)
Finish:	Super Matt
Commercial Class:	Class 33
Connection System:	Unifit X
Installation Type:	Floating
Fire Class:	Cfl-s1
CE Certification:	EN14342:2013

Parky Summit

SMOKED WALNUT – ON ORDER



Specifications

Top Layer:	0.6mm
Length:	2050mm
Width:	233mm
Thickness:	10mm
Core:	High Density Fibreboard (HDF)
Bevel:	4 Bevels (0.5mm)
Finish:	Super Matt
Commercial Class:	Class 33
Connection System:	Unifit X
Installation Type:	Floating
Fire Class:	Cfl-s1
CE Certification:	EN14342:2013

Parky Summit

STARDUST WALNUT – ON ORDER



Specifications

Top Layer:	0.6mm
Length:	2050mm
Width:	233mm
Thickness:	10mm
Core:	High Density Fibreboard (HDF)
Bevel:	4 Bevels (0.5mm)
Finish:	Super Matt
Commercial Class:	Class 33
Connection System:	Unifit X
Installation Type:	Floating
Fire Class:	Cfl-s1
CE Certification:	EN14342:2013

Parky Summit

VALLEY OAK – ON ORDER



Specifications

Top Layer:	0.6mm
Length:	2050mm
Width:	233mm
Thickness:	10mm
Core:	High Density Fibreboard (HDF)
Bevel:	4 Bevels (0.5mm)
Finish:	Super Matt
Commercial Class:	Class 33
Connection System:	Unifit X
Installation Type:	Floating
Fire Class:	Cfl-s1
CE Certification:	EN14342:2013



MODERN, CLASSICAL & STYLISH FLOOR, WALL & WINDOW TREATMENTS.

Inter Decor is a supply and fit out division based in the UAE with an extensive portfolio of floors, wall coverings and window treatment solutions. We offer extensive experience on a broad range of work from small bespoke fit-outs, through to substantial large-scale developments and masterplans

INTER DECOR

Renovation Furniture Trading LLC

T: +91 44533068 E: id@rftgulf.com.com

A: Opal Tower, Office No. 2004, Business Bay,
Burj Khalifa Boulevard, Dubai PO Box 103642.

W: www.interdecor.ae

