




Inter Decor

RENOVATION FURNITURE TRADING LLC

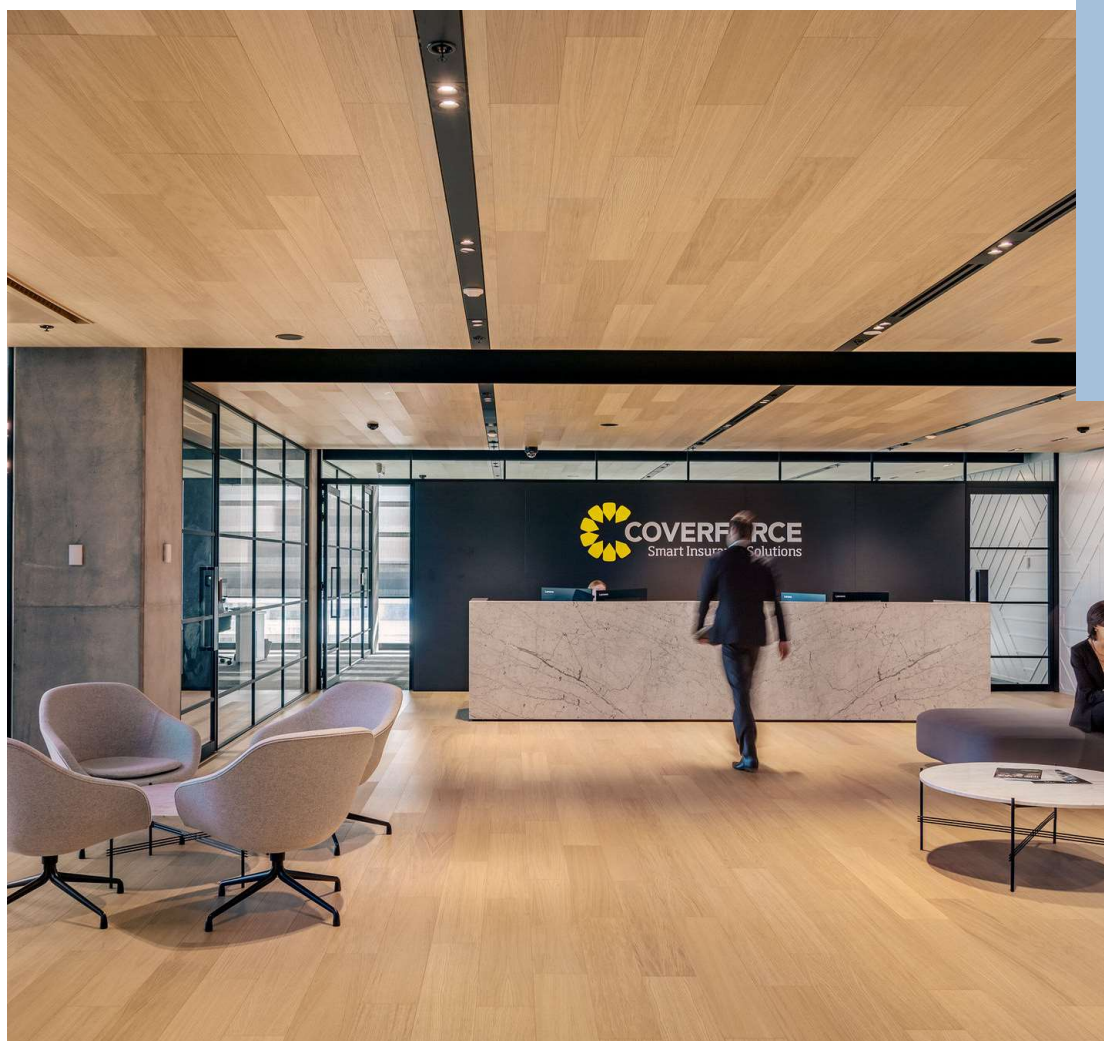

ENGINEERED TIMBER PARKY

MODERN, CLASSICAL & STYLISH
FLOOR, WALL & WINDOW TREATMENTS.

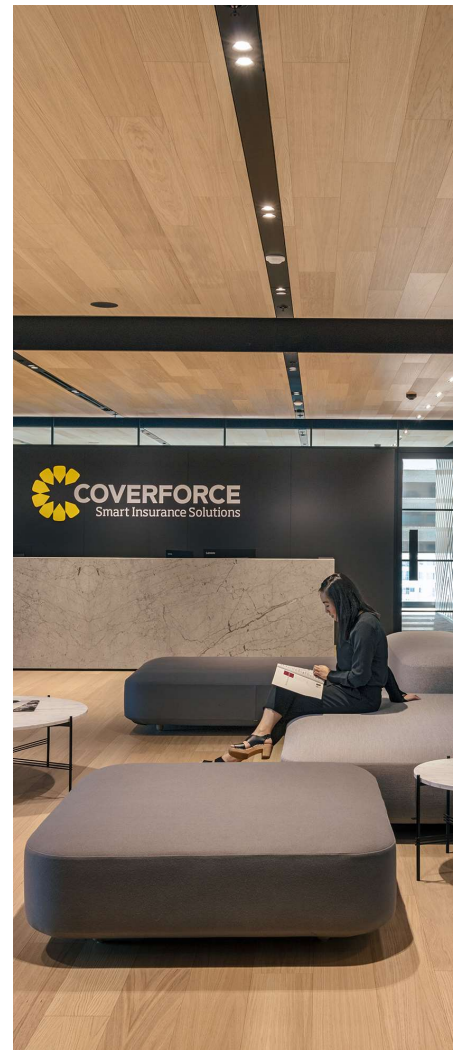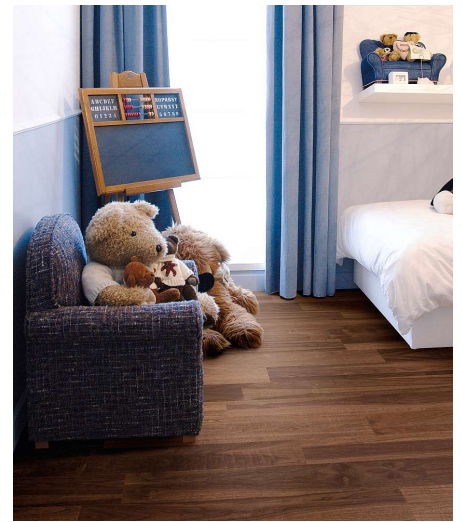


PARKY - DECOSPAN

Parky is a Decospan Group brand, a committed business for over three generations with an insatiable passion for wood. Decospan sees research & development as the key to future growth. Parky is a multi-layer parquet which combines the warmth and unique design of real wood with the technical advantages of rigid board engineered flooring.

PARKY
It's good to live on wood

DECOSPAN
Wood Solutions

PARKY PRO-06

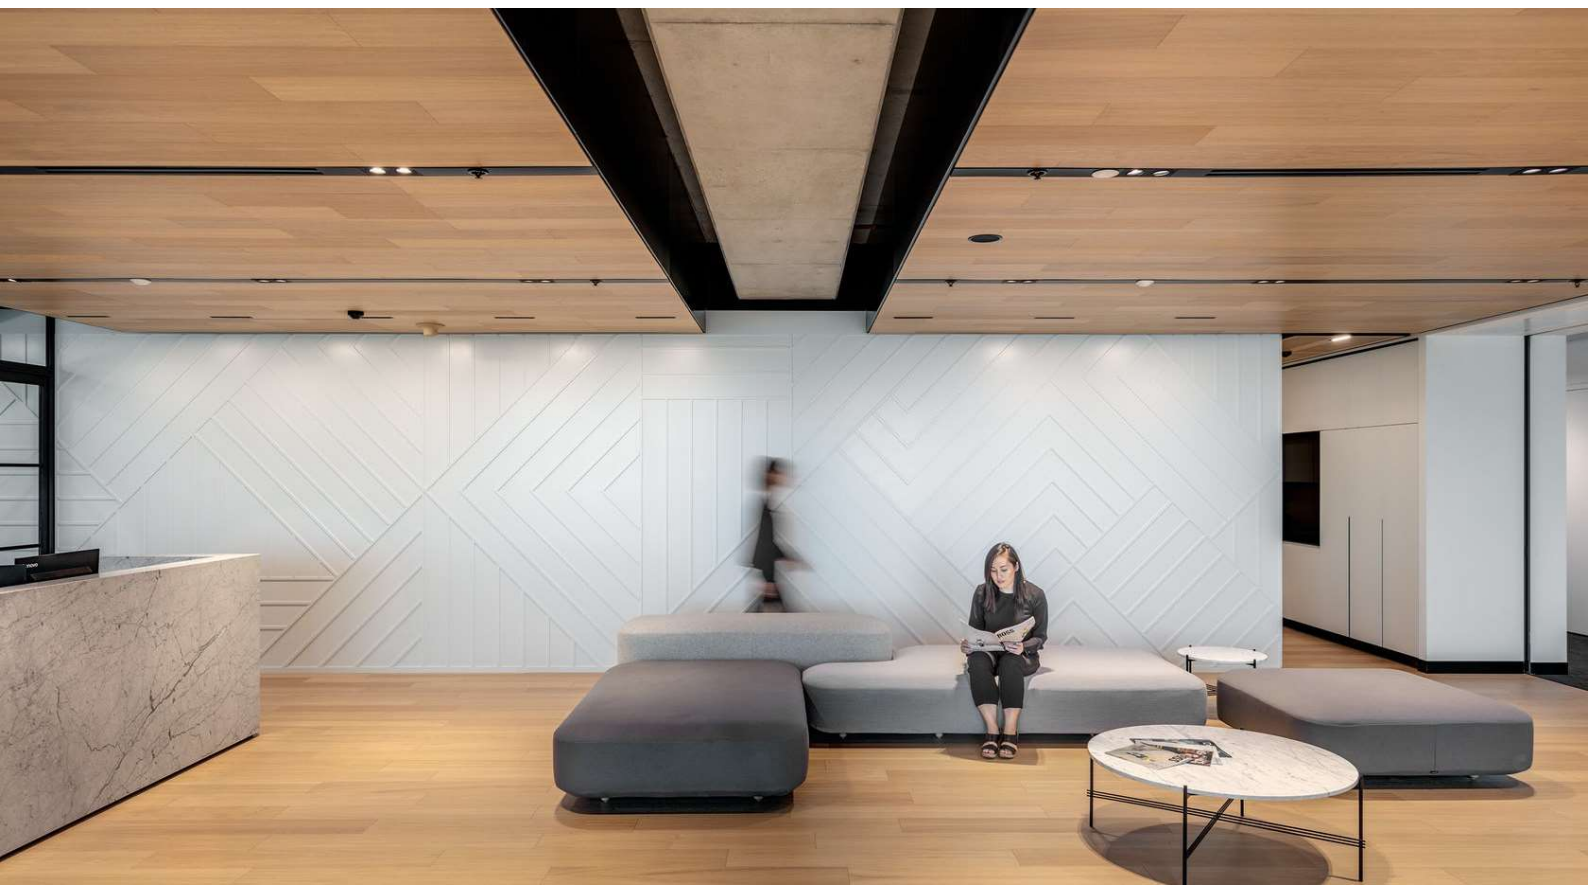

Parky Pro-06

DESERT OAK – IN STOCK



Specifications

Top Layer:	0.6mm
Length:	1203mm
Width:	190mm
Thickness:	7.2mm
Core:	High Density Fibreboard (HDF)
Bevel:	4 Bevels (0.5mm)
Finish:	Super Matt
Commercial Class:	Class 31
Connection System:	Uniclic
Installation Type:	Floating
Fire Class:	Cfl-s1
CE Certification:	EN14342:2013

Parky Pro-06

ESSENCE OAK – IN STOCK



Specifications

Top Layer:	0.6mm
Length:	1203mm
Width:	190mm
Thickness:	7.2mm
Core:	High Density Fibreboard (HDF)
Bevel:	4 Bevels (0.5mm)
Finish:	Super Matt
Commercial Class:	Class 31
Connection System:	Uniclic
Installation Type:	Floating
Fire Class:	Cfl-s1
CE Certification:	EN14342:2013

Parky Pro-06

IVORY OAK – IN STOCK



Specifications

Top Layer:	0.6mm
Length:	1203mm
Width:	190mm
Thickness:	7.2mm
Core:	High Density Fibreboard (HDF)
Bevel:	4 Bevels (0.5mm)
Finish:	Super Matt
Commercial Class:	Class 31
Connection System:	Uniclic
Installation Type:	Floating
Fire Class:	Cfl-s1
CE Certification:	EN14342:2013

Parky Pro-06

MILK OAK – IN STOCK



Specifications

Top Layer:	0.6mm
Length:	1203mm
Width:	190mm
Thickness:	7.2mm
Core:	High Density Fibreboard (HDF)
Bevel:	4 Bevels (0.5mm)
Finish:	Super Matt
Commercial Class:	Class 31
Connection System:	Uniclic
Installation Type:	Floating
Fire Class:	Cfl-s1
CE Certification:	EN14342:2013

Parky Pro-06

SMOKED WALNUT- IN STOCK




Specifications

Top Layer:	0.6mm
Length:	1203mm
Width:	190mm
Thickness:	7.2mm
Core:	High Density Fibreboard (HDF)
Bevel:	4 Bevels (0.5mm)
Finish:	Super Matt
Commercial Class:	Class 31
Connection System:	Uniclic
Installation Type:	Floating
Fire Class:	Cfl-s1
CE Certification:	EN14342:2013

Parky Pro-06

CHOCOLATE OAK OAK – ON ORDER

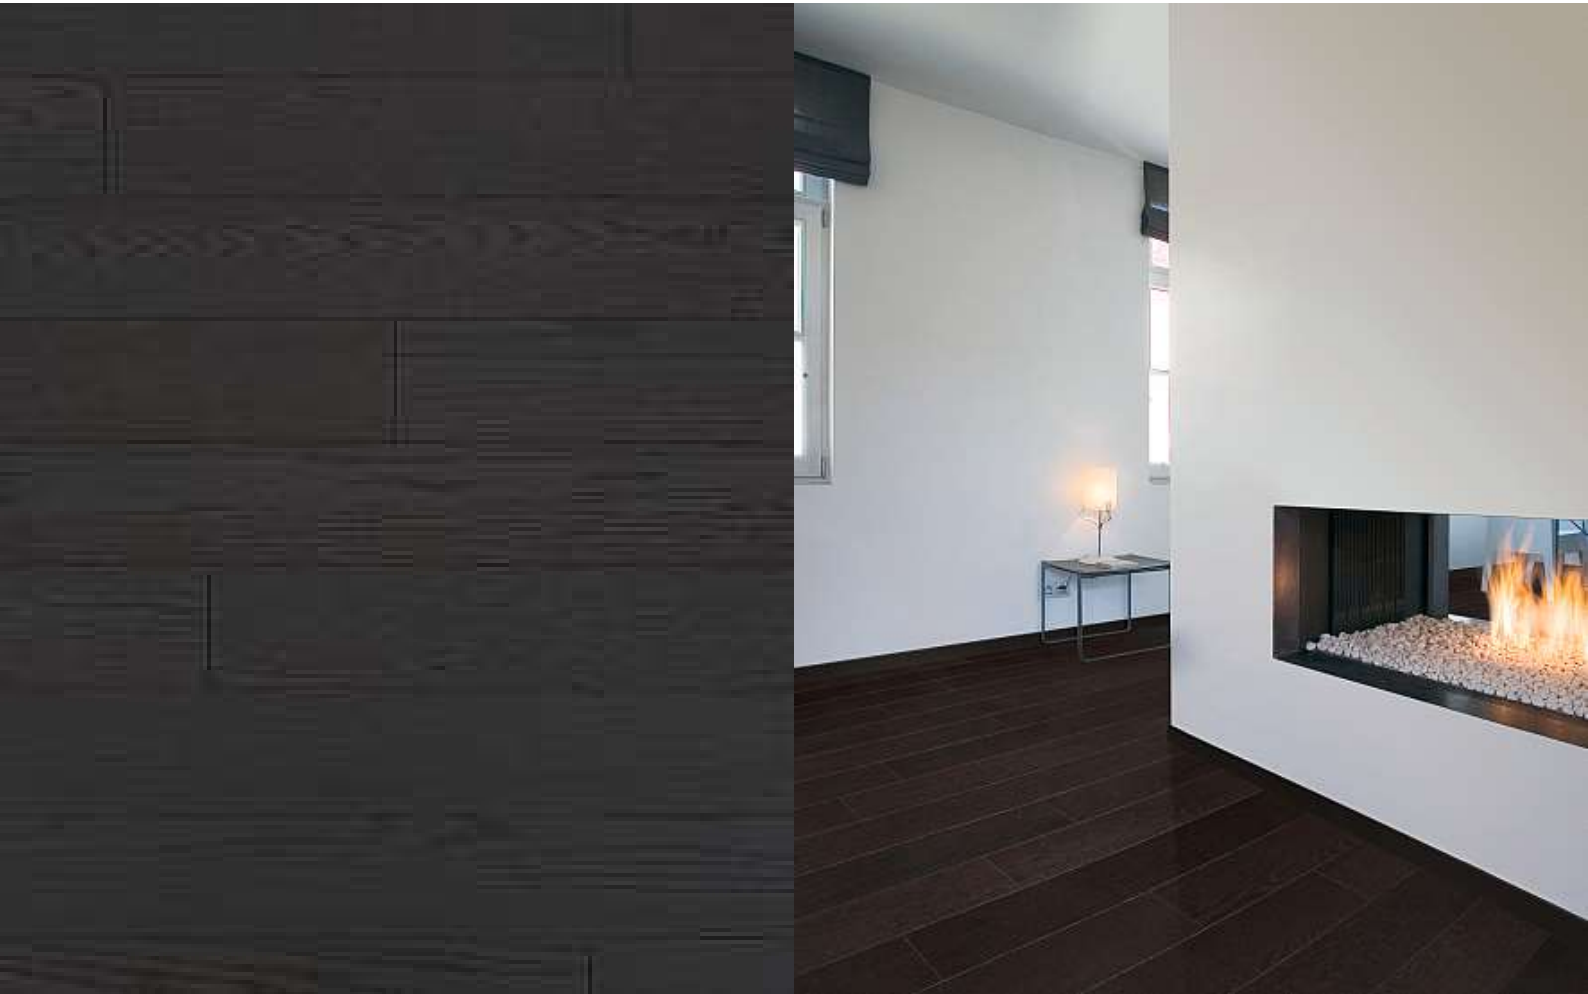

Specifications

Top Layer:	0.6mm
Length:	1203mm
Width:	190mm
Thickness:	7.2mm
Core:	High Density Fibreboard (HDF)
Bevel:	4 Bevels (0.5mm)
Finish:	Super Matt
Commercial Class:	Class 31
Connection System:	Uniclic
Installation Type:	Floating
Fire Class:	Cfl-s1
CE Certification:	EN14342:2013

Parky Pro-06

MANHATTAN OAK – ON ORDER



Specifications

Top Layer:	0.6mm
Length:	1203mm
Width:	190mm
Thickness:	7.2mm
Core:	High Density Fibreboard (HDF)
Bevel:	4 Bevels (0.5mm)
Finish:	Super Matt
Commercial Class:	Class 31
Connection System:	Uniclic
Installation Type:	Floating
Fire Class:	Cfl-s1
CE Certification:	EN14342:2013

Parky Pro-06

UMBER OAK – ON ORDER



Specifications

Top Layer:	0.6mm
Length:	1203mm
Width:	190mm
Thickness:	7.2mm
Core:	High Density Fibreboard (HDF)
Bevel:	4 Bevels (0.5mm)
Finish:	Super Matt
Commercial Class:	Class 31
Connection System:	Uniclic
Installation Type:	Floating
Fire Class:	Cfl-s1
CE Certification:	EN14342:2013

PARKY SWING



Parky Swing

DESERT OAK – ON ORDER



Specifications

Top Layer:	0.6mm
Length:	593mm
Width:	121mm
Thickness:	10mm
Core:	High Density Fibreboard (HDF)
Bevel:	4 Bevels (0.5mm)
Finish:	Super Matt
Commercial Class:	Class 31
Connection System:	Unifit X
Installation Type:	Floating
Fire Class:	Cfl-s1
CE Certification:	EN14342:2013

Parky Swing

EUROPEAN OAK – ON ORDER



Specifications

Top Layer:	0.6mm
Length:	593mm
Width:	121mm
Thickness:	10mm
Core:	High Density Fibreboard (HDF)
Bevel:	4 Bevels (0.5mm)
Finish:	Super Matt
Commercial Class:	Class 31
Connection System:	Unifit X
Installation Type:	Floating
Fire Class:	Cfl-s1
CE Certification:	EN14342:2013

Parky Swing



SMOKED WALNUT- ON ORDER



Specifications

Top Layer:	0.6mm
Length:	593mm
Width:	121mm
Thickness:	10mm
Core:	High Density Fibreboard (HDF)
Bevel:	4 Bevels (0.5mm)
Finish:	Super Matt
Commercial Class:	Class 31
Connection System:	Unifit X
Installation Type:	Floating
Fire Class:	Cfl-s1
CE Certification:	EN14342:2013

PARKY SUMMIT

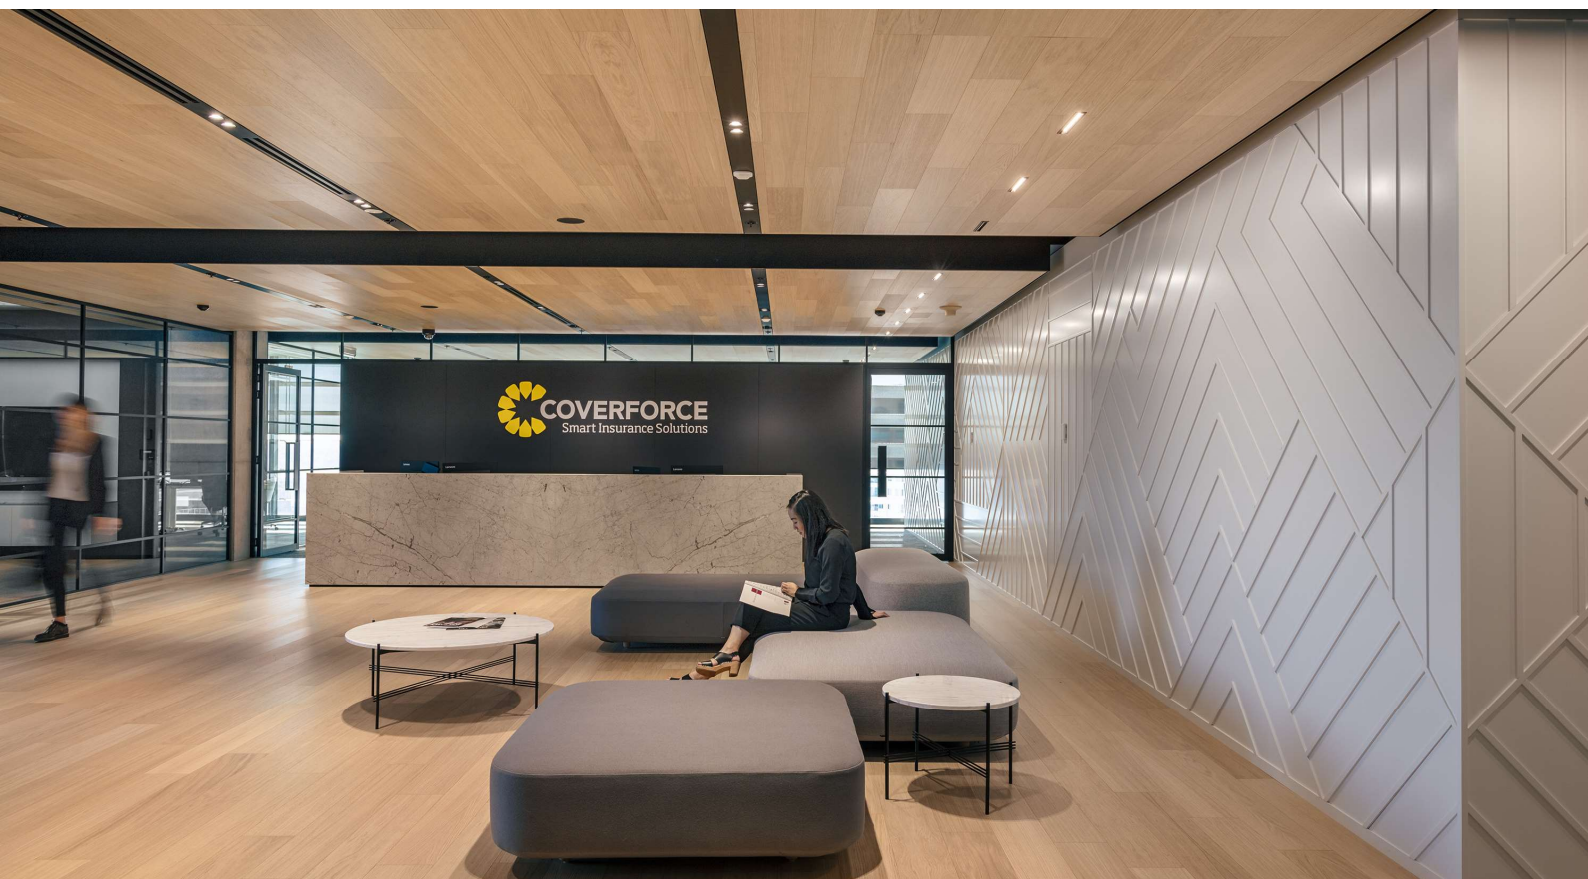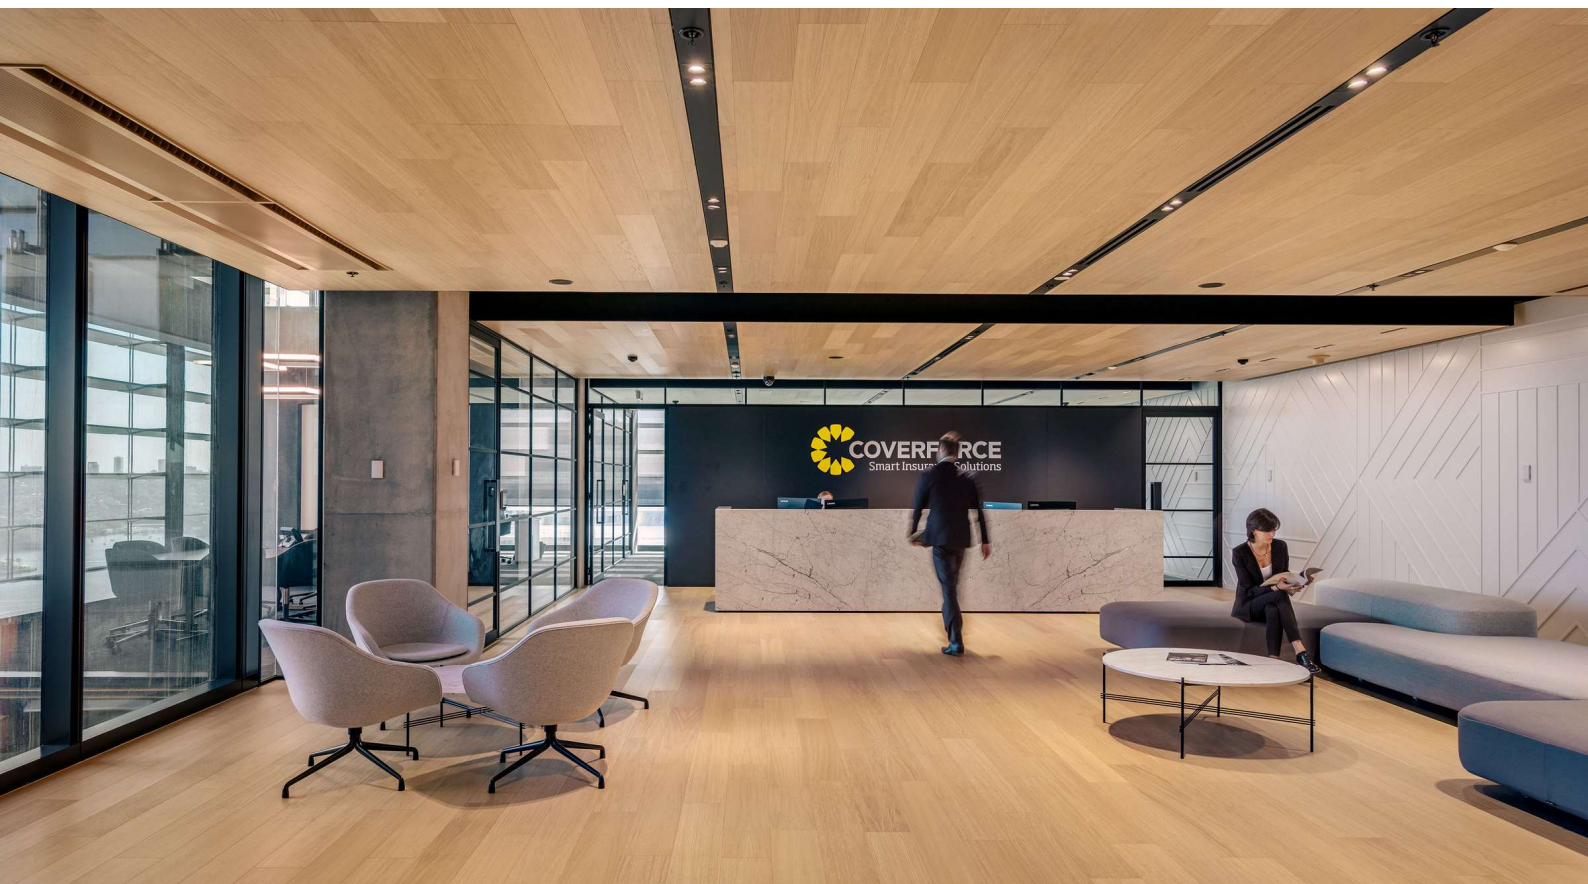

Parky Summit

DUNE OAK – ON ORDER



Specifications

Top Layer:	0.6mm
Length:	2050mm
Width:	233mm
Thickness:	10mm
Core:	High Density Fibreboard (HDF)
Bevel:	4 Bevels (0.5mm)
Finish:	Super Matt
Commercial Class:	Class 33
Connection System:	Unifit X
Installation Type:	Floating
Fire Class:	Cfl-s1
CE Certification:	EN14342:2013

Parky Summit

ESSENCE OAK – ON ORDER



Specifications

Top Layer:	0.6mm
Length:	2050mm
Width:	233mm
Thickness:	10mm
Core:	High Density Fibreboard (HDF)
Bevel:	4 Bevels (0.5mm)
Finish:	Super Matt
Commercial Class:	Class 33
Connection System:	Unifit X
Installation Type:	Floating
Fire Class:	Cfl-s1
CE Certification:	EN14342:2013

Parky Summit

FROZEN WALNUT- ON ORDER



Specifications

Top Layer:	0.6mm
Length:	2050mm
Width:	233mm
Thickness:	10mm
Core:	High Density Fibreboard (HDF)
Bevel:	4 Bevels (0.5mm)
Finish:	Super Matt
Commercial Class:	Class 33
Connection System:	Unifit X
Installation Type:	Floating
Fire Class:	Cfl-s1
CE Certification:	EN14342:2013

Parky Summit

MOUNTAIN OAK – ON ORDER



Specifications

Top Layer:	0.6mm
Length:	2050mm
Width:	233mm
Thickness:	10mm
Core:	High Density Fibreboard (HDF)
Bevel:	4 Bevels (0.5mm)
Finish:	Super Matt
Commercial Class:	Class 33
Connection System:	Unifit X
Installation Type:	Floating
Fire Class:	Cfl-s1
CE Certification:	EN14342:2013

Parky Summit

SILK OAK – ON ORDER



Specifications

Top Layer:	0.6mm
Length:	2050mm
Width:	233mm
Thickness:	10mm
Core:	High Density Fibreboard (HDF)
Bevel:	4 Bevels (0.5mm)
Finish:	Super Matt
Commercial Class:	Class 33
Connection System:	Unifit X
Installation Type:	Floating
Fire Class:	Cfl-s1
CE Certification:	EN14342:2013

Parky Summit

SKY OAK – ON ORDER



Specifications

Top Layer:	0.6mm
Length:	2050mm
Width:	233mm
Thickness:	10mm
Core:	High Density Fibreboard (HDF)
Bevel:	4 Bevels (0.5mm)
Finish:	Super Matt
Commercial Class:	Class 33
Connection System:	Unifit X
Installation Type:	Floating
Fire Class:	Cfl-s1
CE Certification:	EN14342:2013

Parky Summit

SMOKED WALNUT – ON ORDER



Specifications

Top Layer:	0.6mm
Length:	2050mm
Width:	233mm
Thickness:	10mm
Core:	High Density Fibreboard (HDF)
Bevel:	4 Bevels (0.5mm)
Finish:	Super Matt
Commercial Class:	Class 33
Connection System:	Unifit X
Installation Type:	Floating
Fire Class:	Cfl-s1
CE Certification:	EN14342:2013

Parky Summit

STARDUST WALNUT – ON ORDER



Specifications

Top Layer:	0.6mm
Length:	2050mm
Width:	233mm
Thickness:	10mm
Core:	High Density Fibreboard (HDF)
Bevel:	4 Bevels (0.5mm)
Finish:	Super Matt
Commercial Class:	Class 33
Connection System:	Unifit X
Installation Type:	Floating
Fire Class:	Cfl-s1
CE Certification:	EN14342:2013


Parky Summit

VALLEY OAK – ON ORDER



Specifications

Top Layer:	0.6mm
Length:	2050mm
Width:	233mm
Thickness:	10mm
Core:	High Density Fibreboard (HDF)
Bevel:	4 Bevels (0.5mm)
Finish:	Super Matt
Commercial Class:	Class 33
Connection System:	Unifit X
Installation Type:	Floating
Fire Class:	Cfl-s1
CE Certification:	EN14342:2013

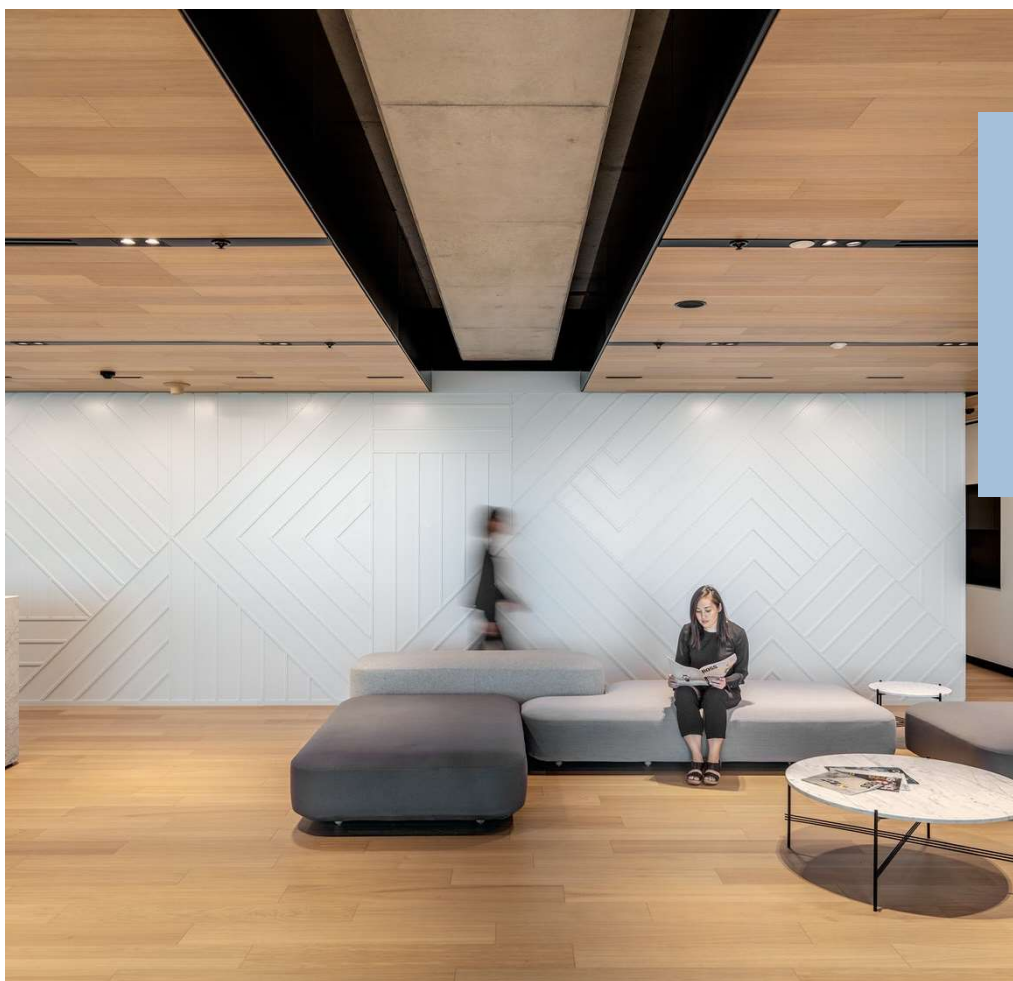

MODERN, CLASSICAL & STYLISH FLOOR, WALL & WINDOW TREATMENTS.

Inter Decor is a supply and fit out division based in the UAE with an extensive portfolio of floors, wall coverings and window treatment solutions. We offer extensive experience on a broad range of work from small bespoke fit-outs, through to substantial large-scale developments and masterplans

INTER DECOR

Renovation Furniture Trading LLC

T: +91 44533068 E: id@rftgulf.com.com

A: Opal Tower, Office No. 2004, Business Bay,
Burj Khalifa Boulevard, Dubai PO Box 103642.

W: www.interdecor.ae

