





Inter Decor

RENOVATION FURNITURE TRADING LLC



UNDERLAYS – IN STOCK

MODERN, CLASSICAL & STYLISH
FLOOR, WALL & WINDOW TREATMENTS.

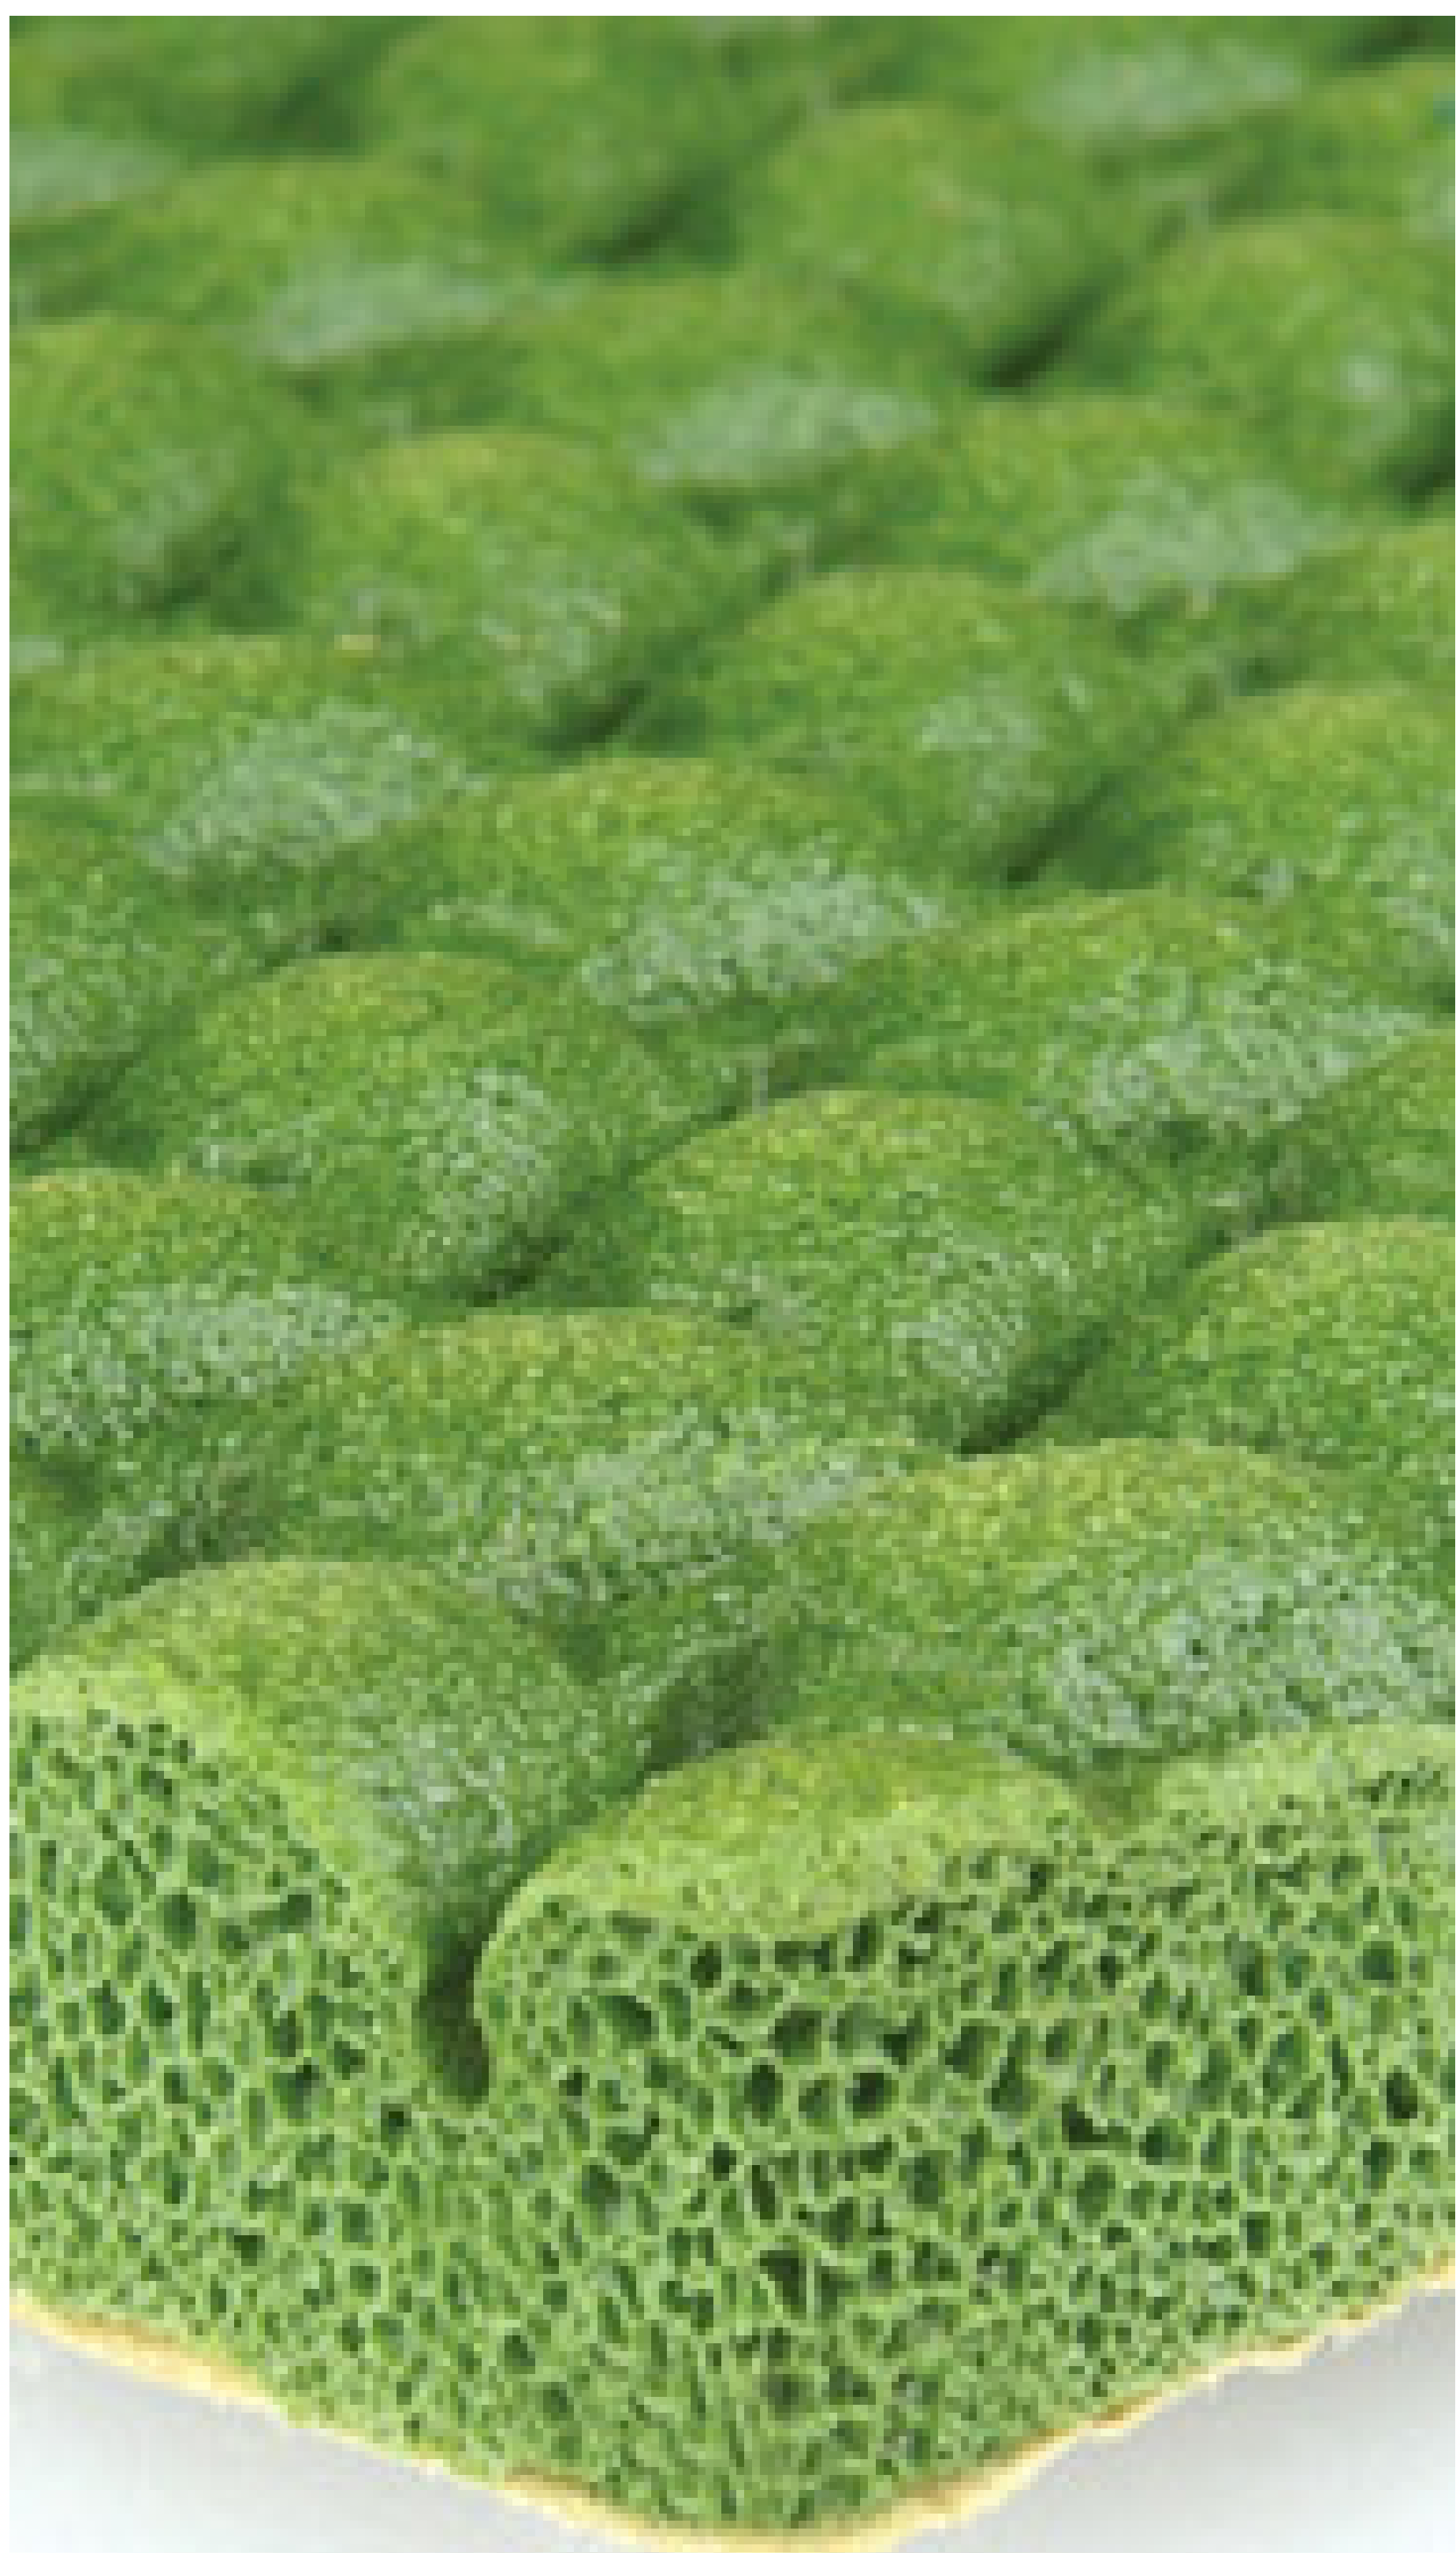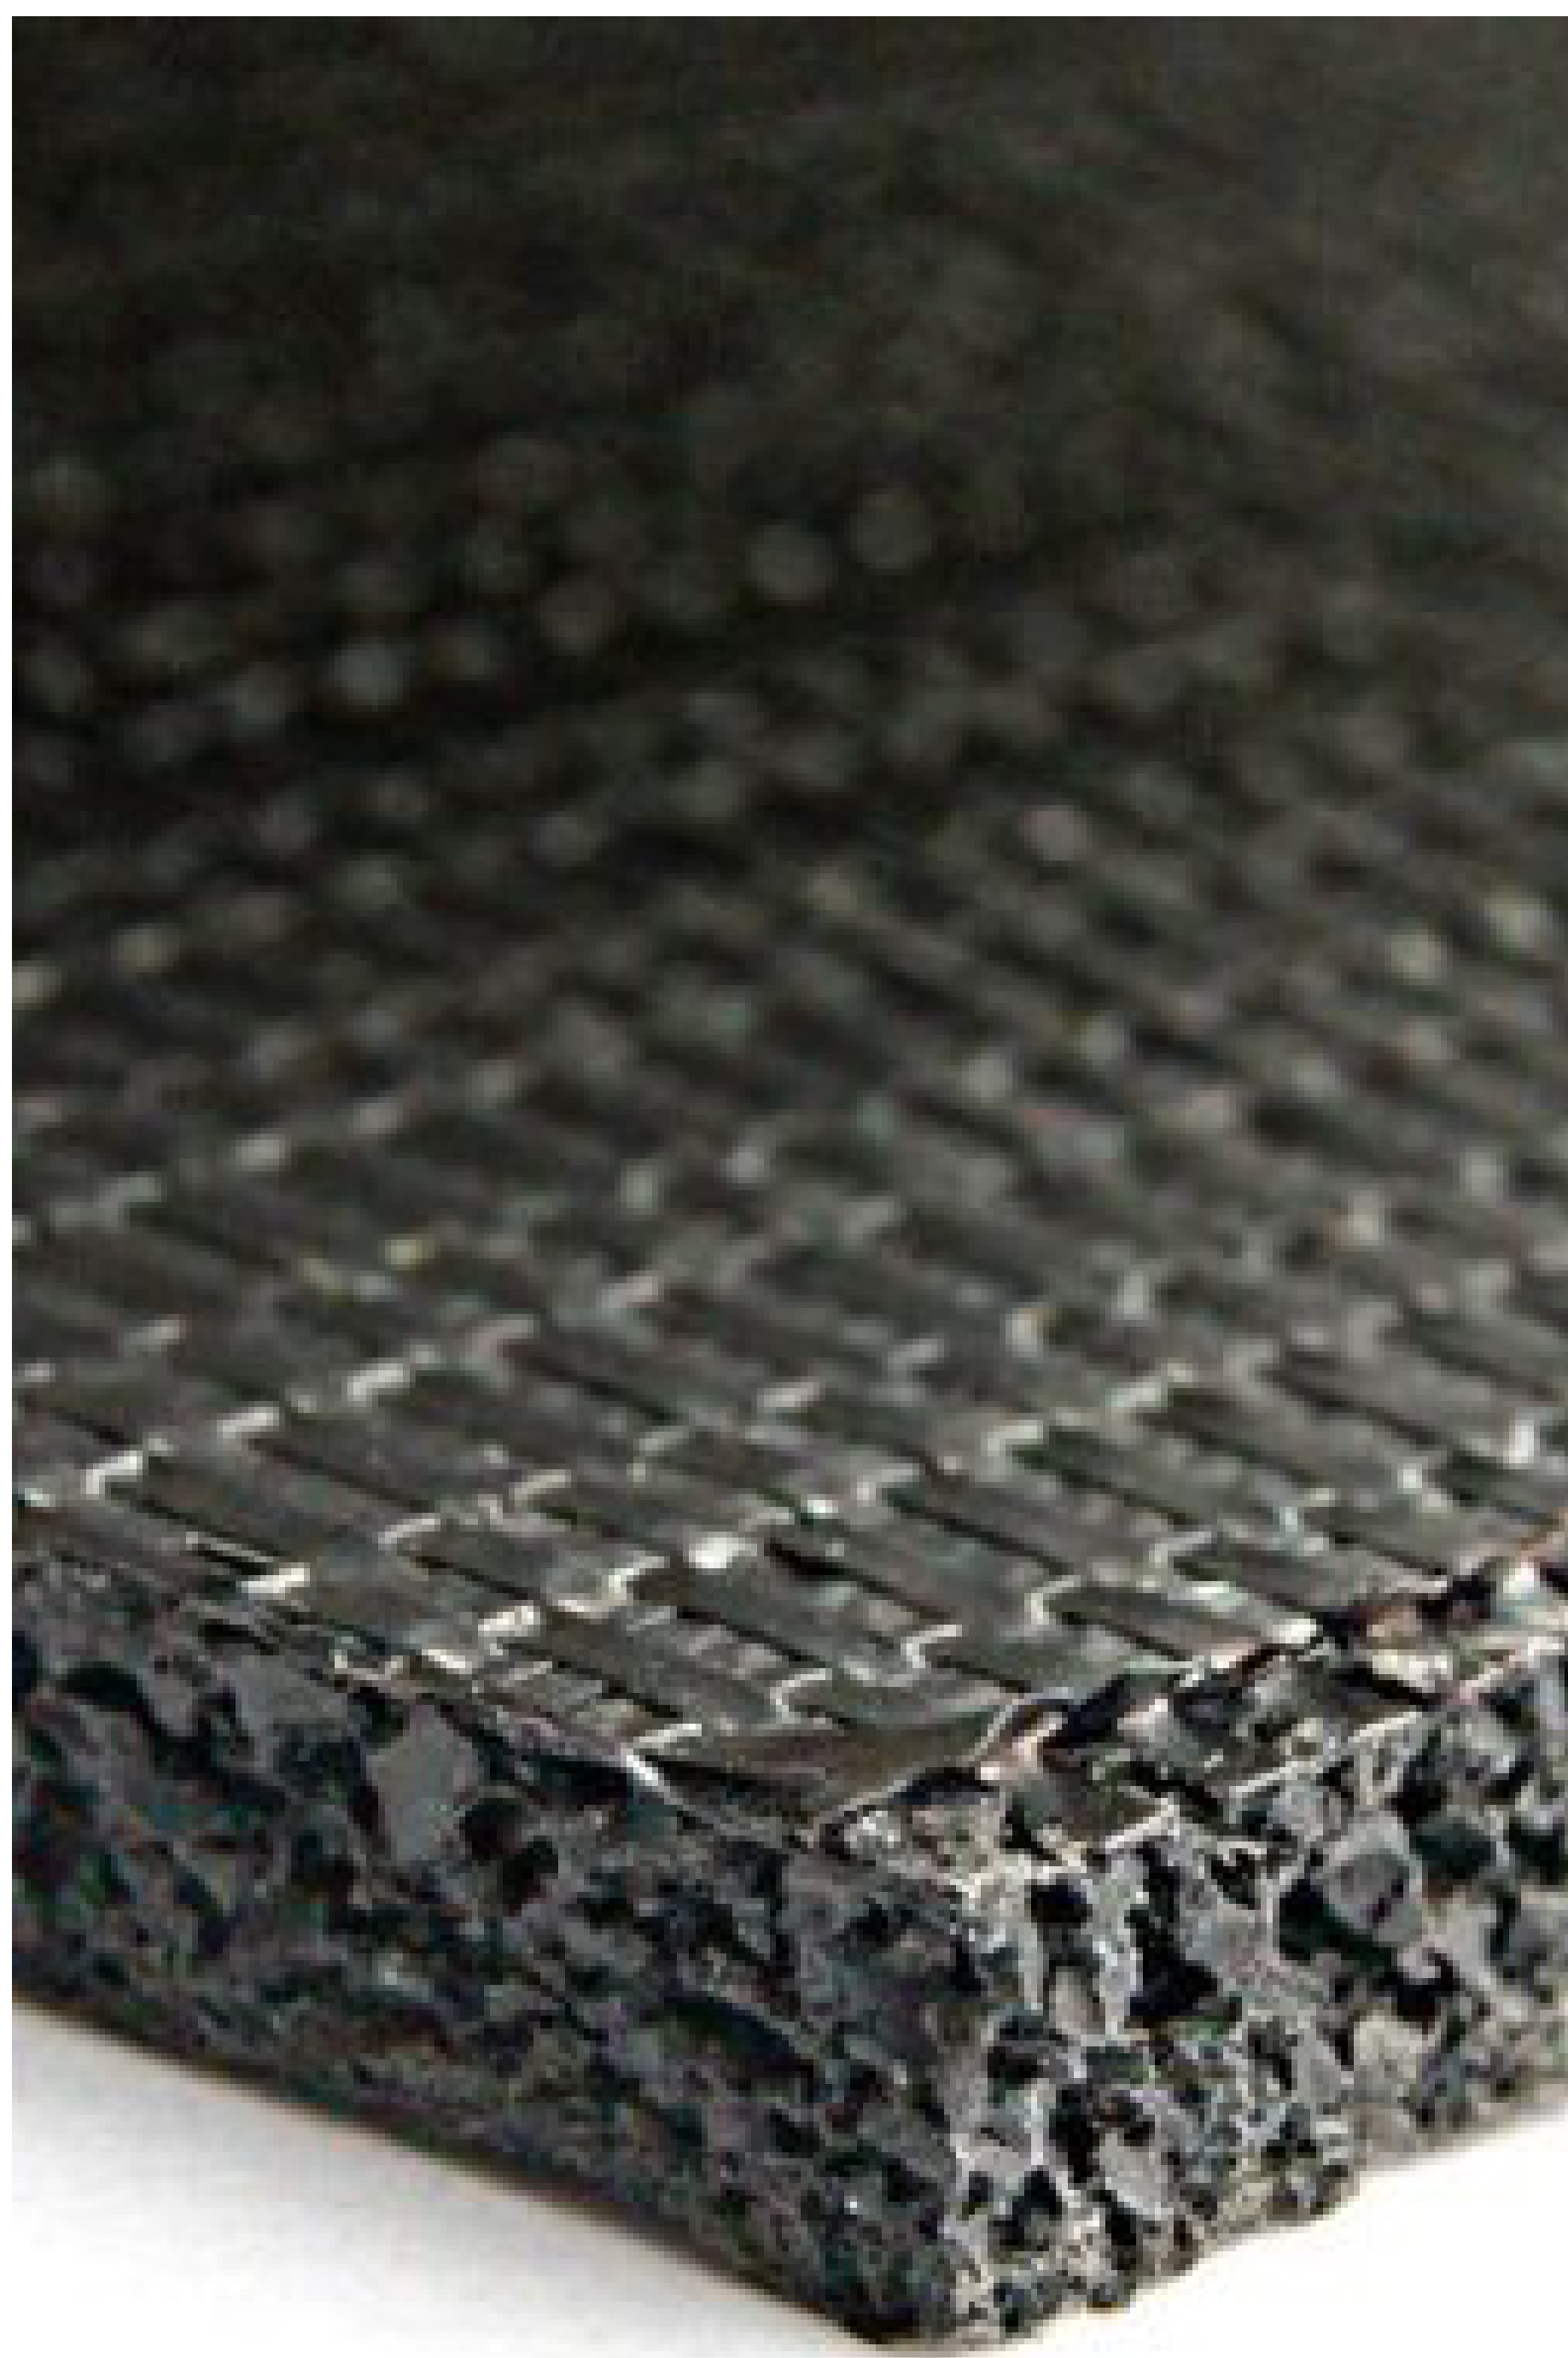

INTERFLOOR

Interfloor is Europe's largest manufacturer of carpet underlay, hard flooring underlay and flooring accessories. Interfloor manufactures a diverse range of products including the three most popular form of underlay – polyurethane foam, sponge rubber and crumb rubber. Interfloor brands include Duralay, Sonixx Tredaire, Gripperrods & Stikatak.


interfloor

SONIXX
Performance. Comfort. Endurance.

Duralay **tredaire** **Gripperrods** **STIKATAK**

Durafit 500

interfloor

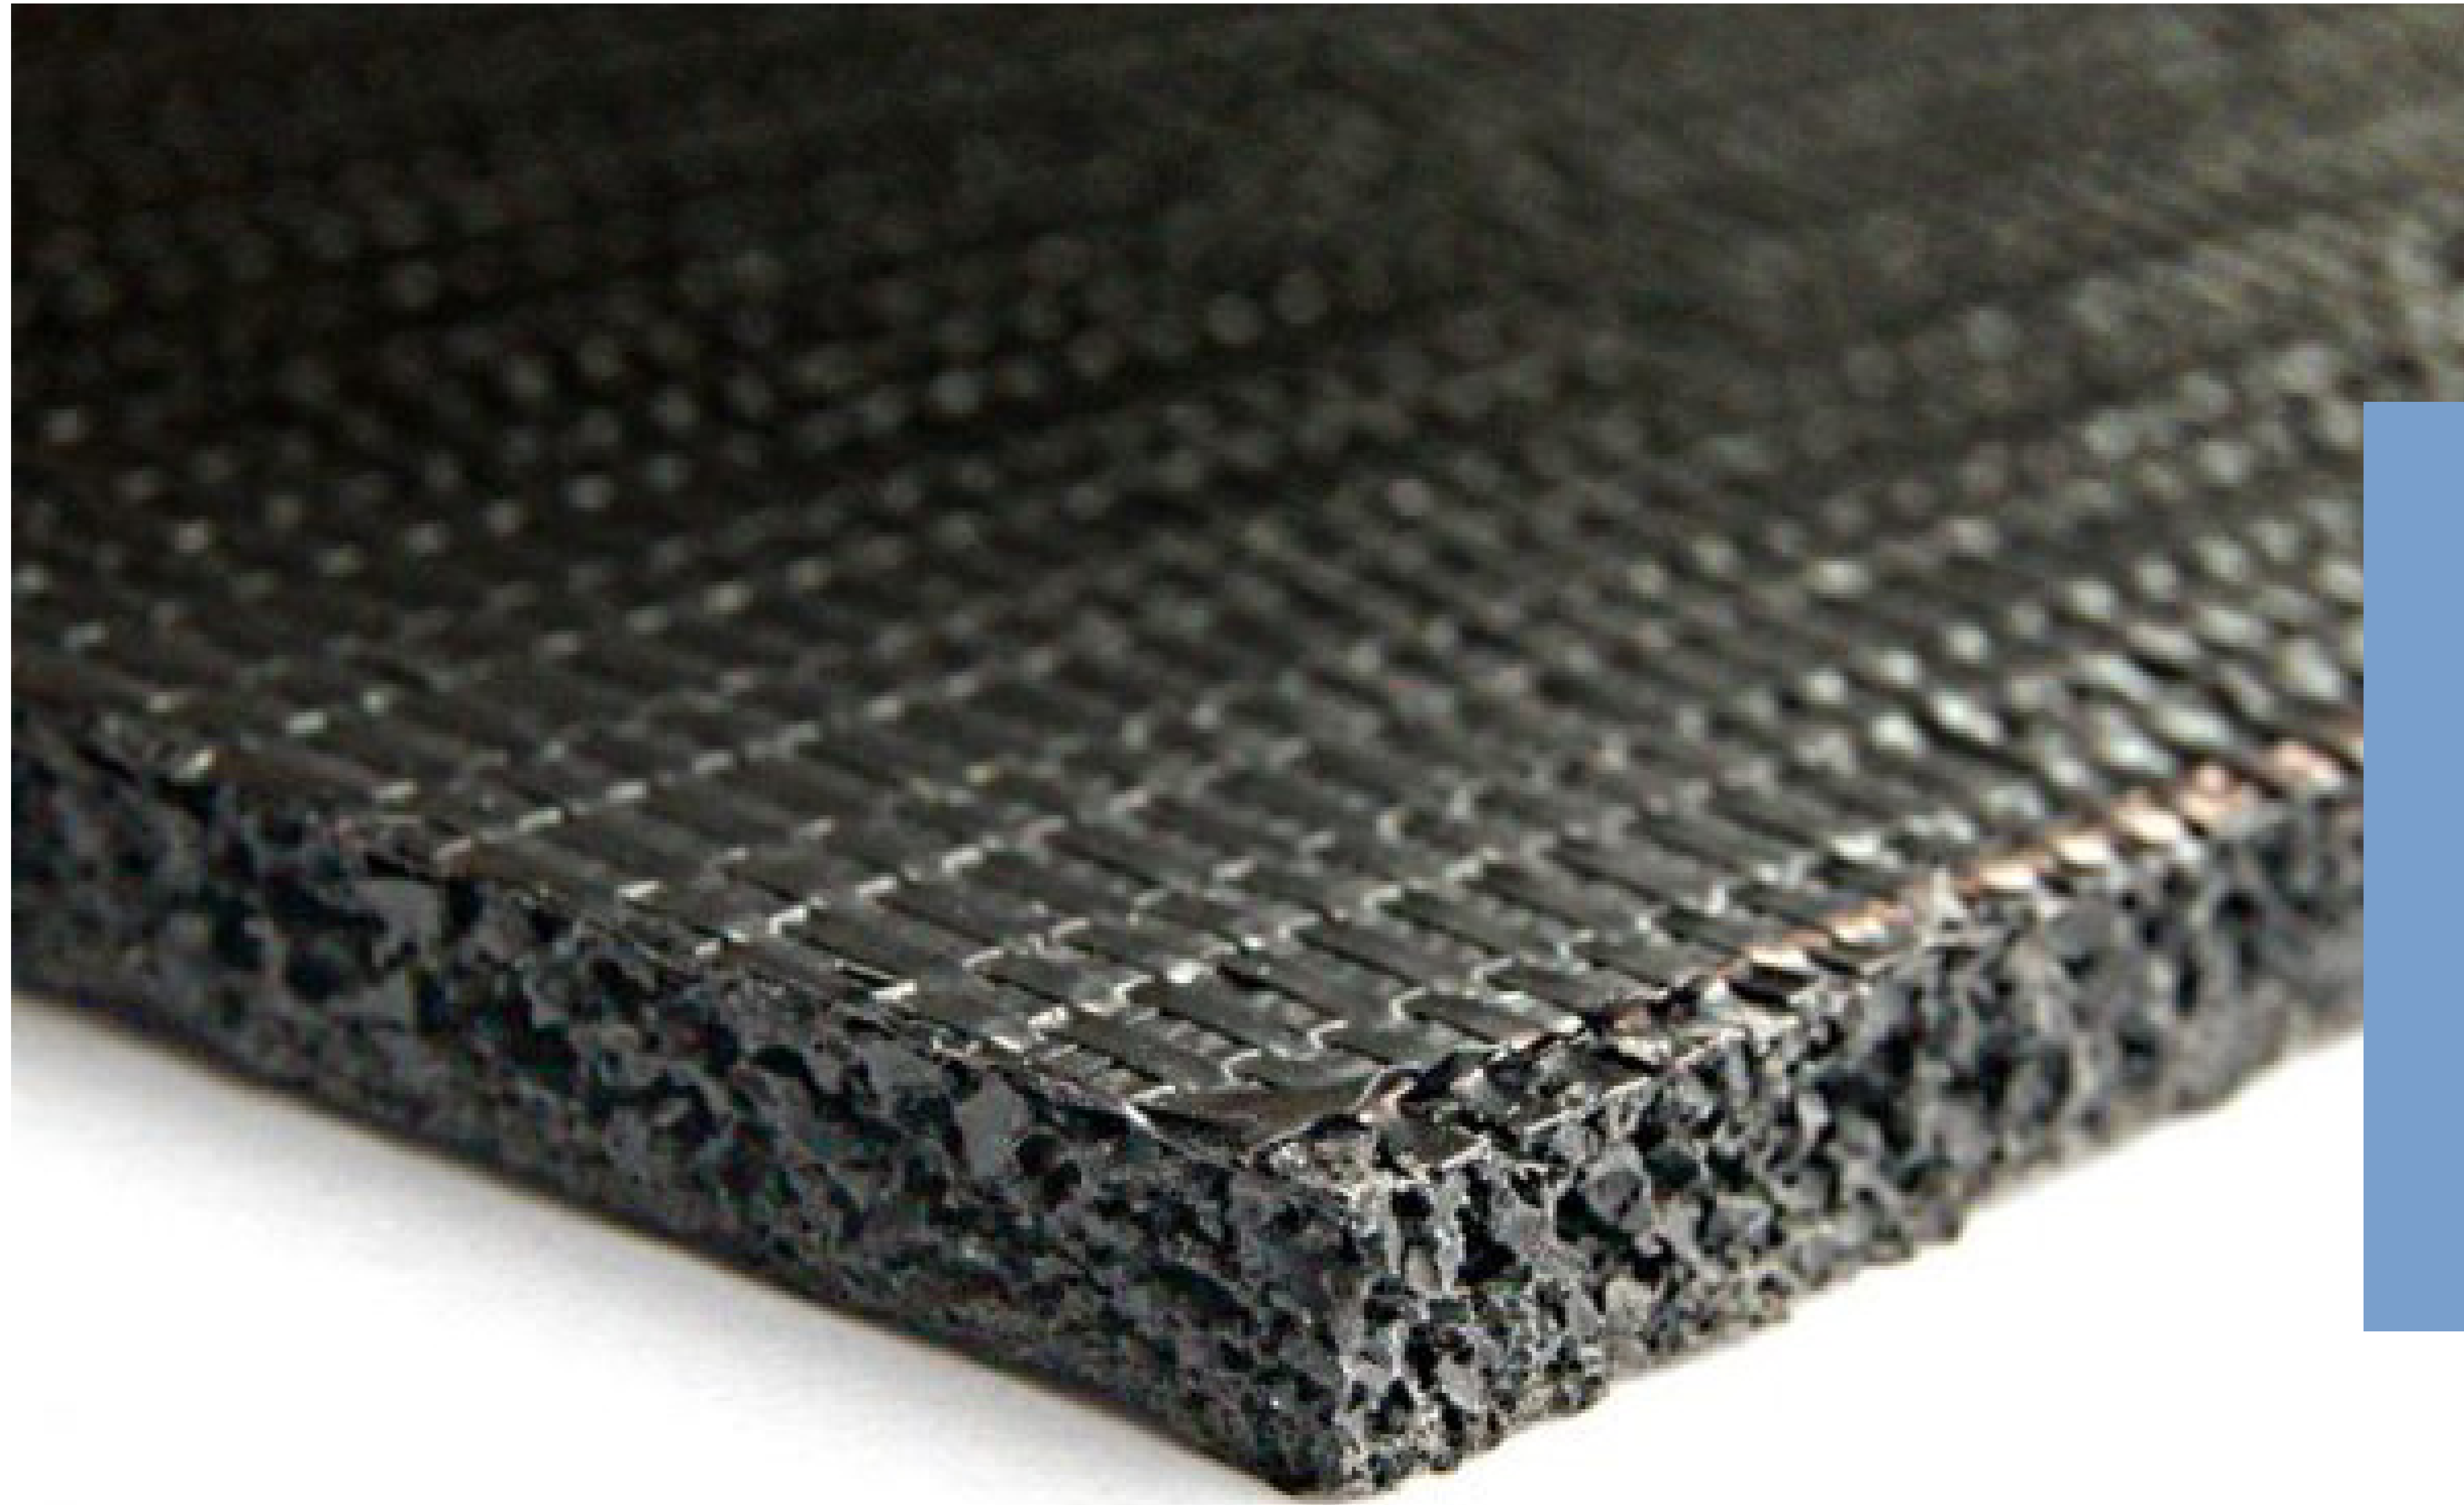

Adhesives

The complete package

Durafit adhesives are specially designed to work with all our underlays. Use the complete system to ensure a great finished installation and added peace of mind.




Specifications

Floor Usage:	Carpet
Installation Method:	Double-Stick
Construction:	Crumb Rubber (Reinforced)
Thickness:	5.25mm
Square Weight:	2100 g/m ²
Roll Area:	15.07m ²
End Use Classification	HC/U Heavy Contract
Odour:	No Objectionable Odour
French VOC Emission Regs:	A+
Anti-Microbial & Mildew:	Pass
Impact Sound Reduction:	26 dB
Recyclable:	100%
Indoor Air Quality:	Green Label Plus Certified

Durafit 650

interfloor

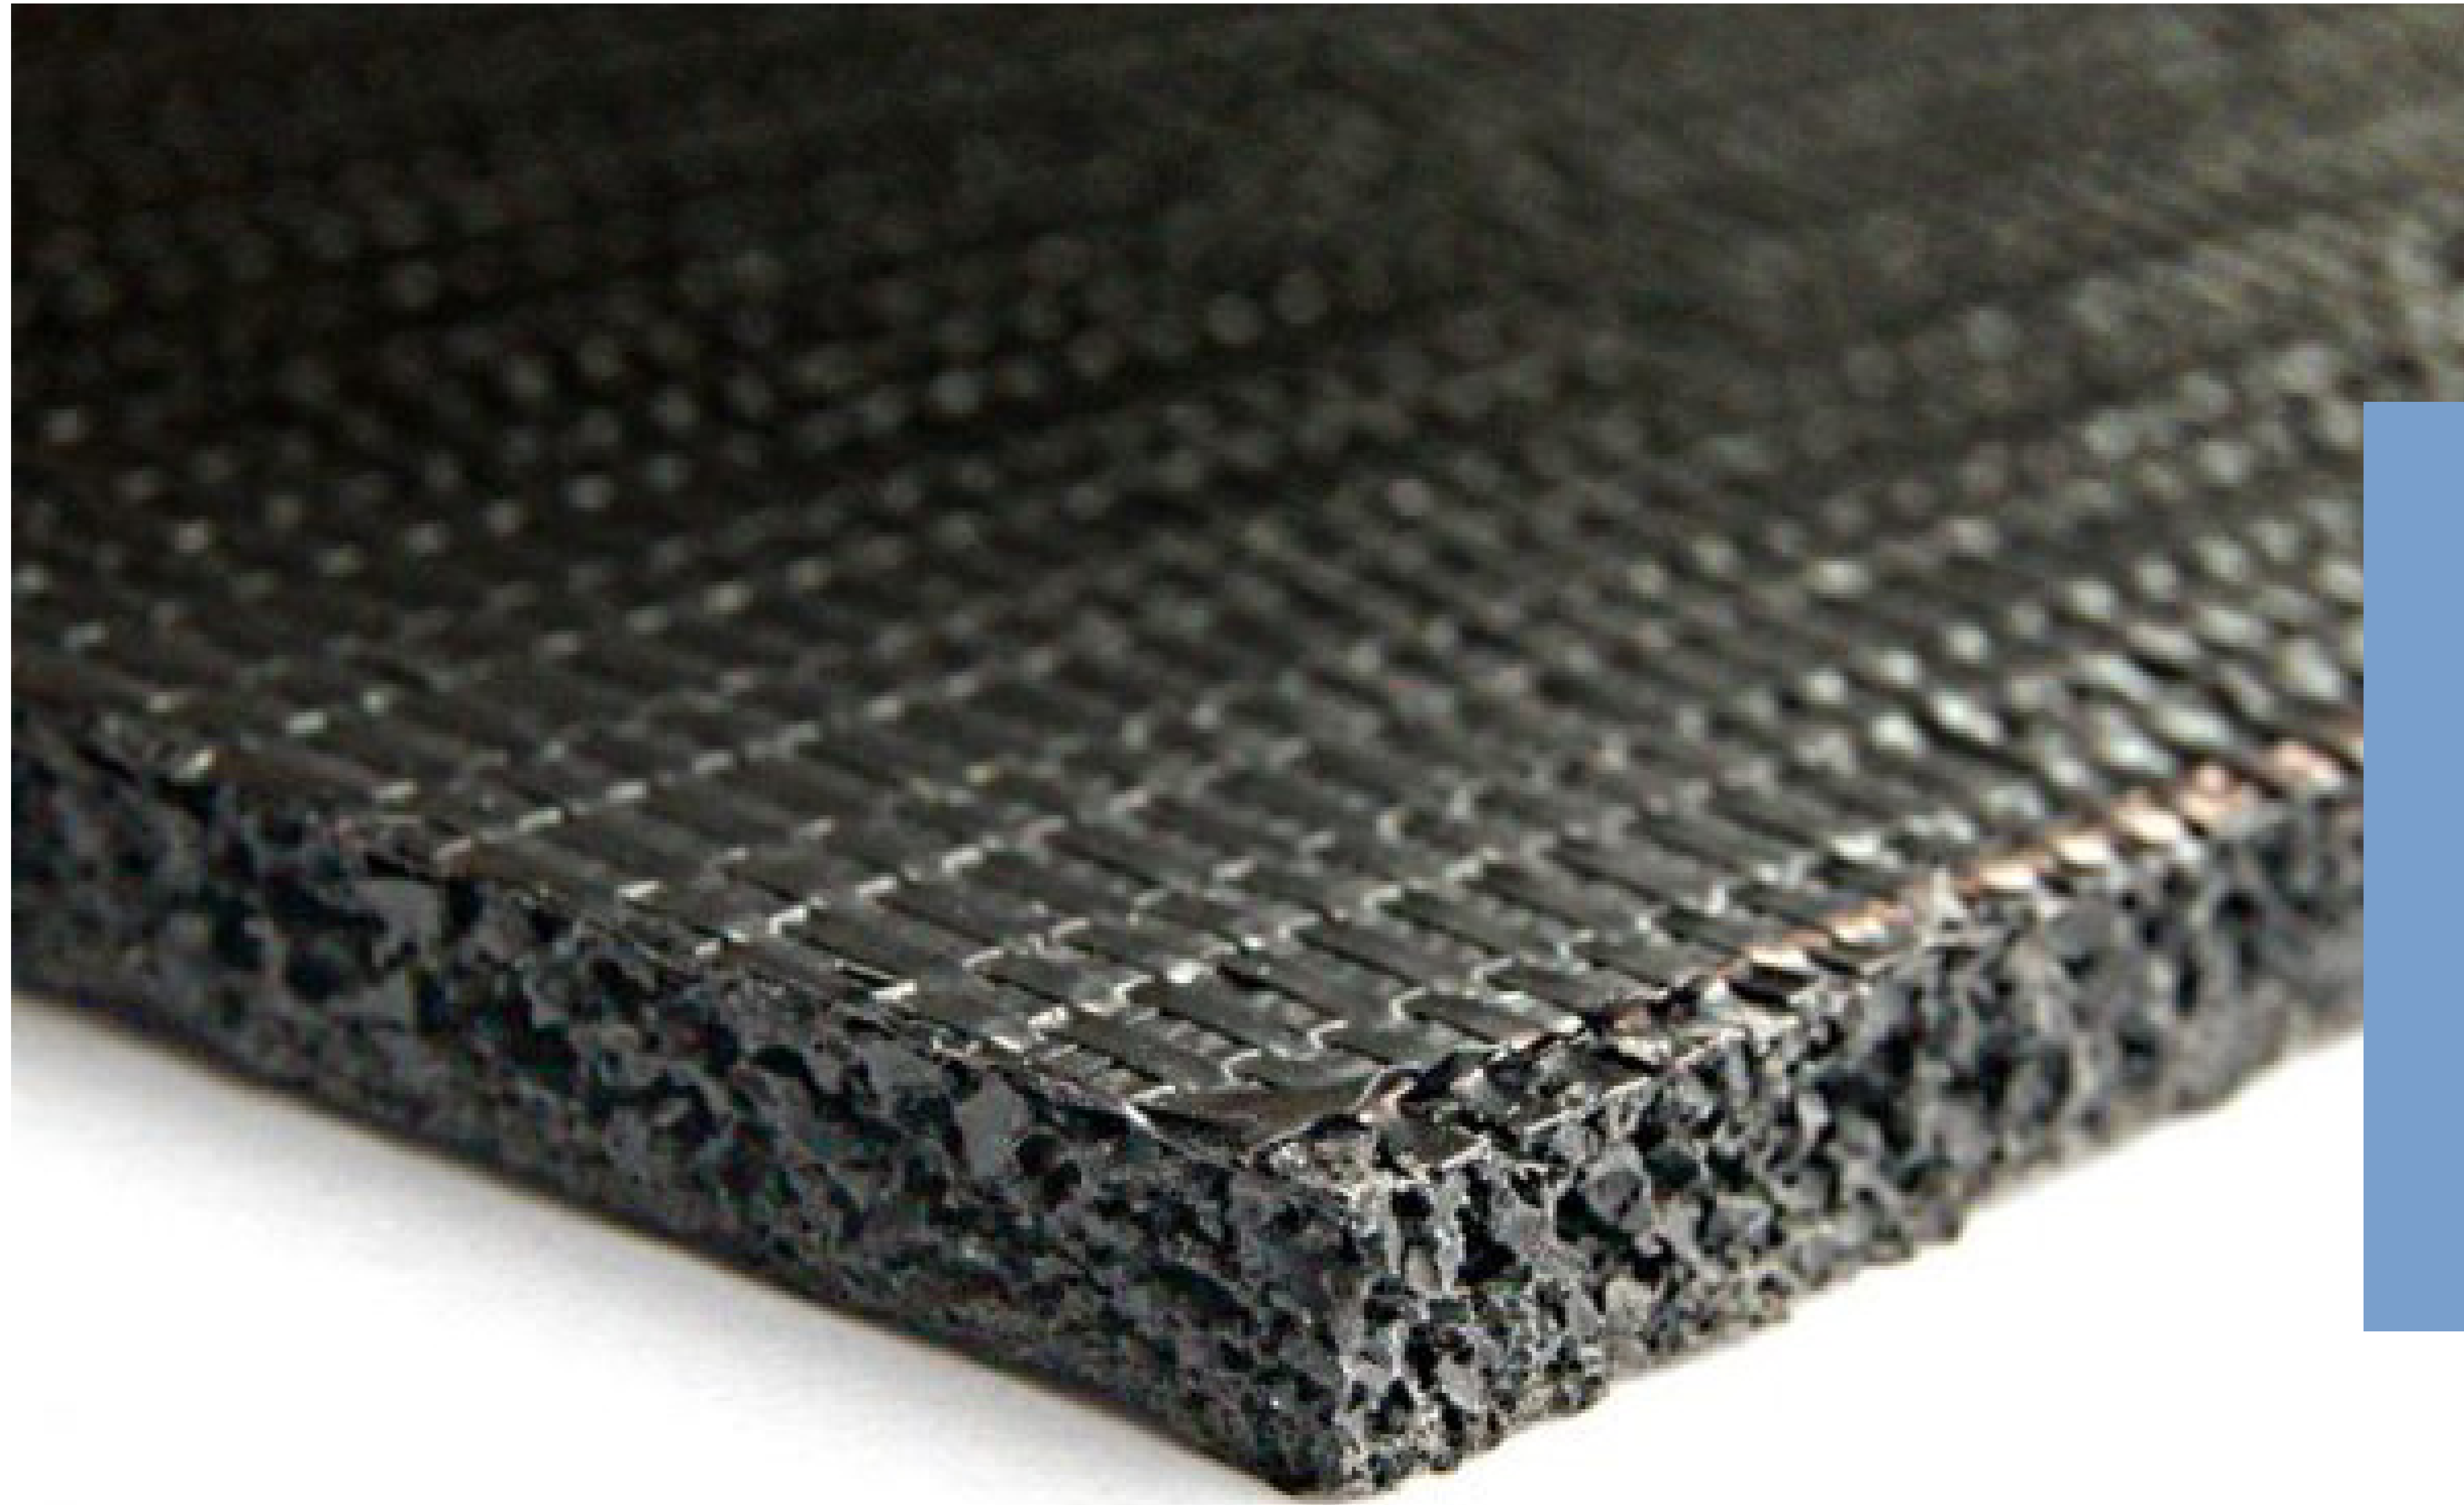

Adhesives

The complete package

Durafit adhesives are specially designed to work with all our underlays. Use the complete system to ensure a great finished installation and added peace of mind.



Specifications

Floor Usage:	Carpet
Installation Method:	Double-Stick
Construction:	Crumb Rubber (Reinforced)
Thickness:	6.5 mm
Square Weight:	2700 g/m ²
Roll Area:	15.07m ²
End Use Classification	HC/U Heavy Contract
Odour:	No Objectionable Odour
French VOC Emission Regs:	A+
Anti-Microbial & Mildew:	Pass
Impact Sound Reduction:	29 dB
Recyclable:	100%
Indoor Air Quality:	Green Label Plus Certified



Adhesives

The complete package

DuraFit adhesives are specially designed to work with all our underlays. Use the complete system to ensure a great finished installation and added peace of mind.



Specifications

Floor Usage:	Carpet
Installation Method:	Stretch Fit or Double Stick
Construction:	PU
Thickness:	7 mm
Square Weight:	1015 g/m ²
Roll Area:	15.07 m ²
End Use Classification	HC/U Heavy Contract Use
Odour:	No Objectionable Odour
Anti-Microbial & Mildew:	Pass
Impact Sound Reduction:	34 dB
Recyclable:	100%
Indoor Air Quality:	Green Label Plus Certified

Step 100



Grippers

The complete package

Interfloor grippers are specially designed to work with all our underlays. Use the complete system to ensure a great finished installation and added peace of mind.



Specifications

Floor Usage:	Carpet
Installation Method:	Stretch Fit
Construction:	Sponge Rubber
Thickness:	8.90 mm
Square Weight:	3017 g/m ²
Roll Area:	15.07 m ²
End Use Classification	GD/U General Use & Contract
Odour:	No Objectionable Odour
French VOC Emission Regs:	A+
Anti-Microbial & Mildew:	Pass
Impact Sound Reduction:	35 dB
Recyclable:	100%
Indoor Air Quality:	Green Label Plus Certified



Grippers

The complete package

Interfloor grippers are specially designed to work with all our underlays. Use the complete system to ensure a great finished installation and added peace of mind.



Specifications

Floor Usage:	Carpet
Installation Method:	Stretch Fit
Construction:	Sponge Rubber
Thickness:	9.4 mm
Square Weight:	3458 g/m ²
Roll Area:	10.96 m ²
End Use Classification	L/U Luxury & Contract
Odour:	No Objectionable Odour
French VOC Emission Regs:	A+
Anti-Microbial & Mildew:	Pass
Impact Sound Reduction:	35 dB
Recyclable:	100%
Indoor Air Quality:	Green Label Plus Certified

Resilient 250

interfloor



Specifications

Floor Usage:	Wide Range of Flooring
Installation Method:	Glue Down (above screed)
Construction:	Sponge Rubber
Thickness:	2.50 mm
Density:	960 g/m ³
Roll Area:	10.00 m ²
End Use Classification	Heavy Contract Use
Resistance to Cracking:	No Cracking Visible
Odour:	No Objectionable Odour
Anti-Microbial & Mildew:	Yes
Impact Sound Reduction:	19 dB
Recyclable:	100%
Reaction to Fire:	Bfl-s1
Indoor Air Quality:	Green Label Plus Certified

Soundsure 560

interfloor



Specifications

Floor Usage:	Wide Range of Flooring
Installation Method:	Glue Down (below screed)
Construction:	Crumb Rubber
Thickness:	5.60 mm
Density:	400 kg/m ³
Roll Area:	10.00 m ²
End Use Classification	Heavy Contract Use
Resistance to Cracking:	No Cracking (longer than 50mm)
Odour:	No Objectionable Odour
Anti-Microbial & Mildew:	Yes
Impact Sound Reduction:	27 dB
Recyclable:	100%
Indoor Air Quality:	Green Label Plus Certified

Timbermate Excel



Specifications

Floor Usage:	Timber & Laminate
Installation Method:	Loose Lay
Construction:	Laminate Sponge Rubber
Thickness:	3.6 mm
Square Weight:	3545 g/m ²
Roll Area:	15.07 m ²
End Use Classification	HC/U Heavy Contract Use
Odour:	No Objectionable Odour
French VOC Emission Regs:	A+
Anti-Microbial & Mildew:	Pass
Impact Sound Reduction:	23 dB
Recyclable:	100%
Emissions:	Meets or Exceeds / CRI Green Label



Specifications

Floor Usage:	LVT
Installation Method:	Loose Lay
Construction:	Sponge Rubber
Thickness:	1.5 mm
Square Weight:	2500 g/m ²
Roll Area:	10.00 m ²
End Use Classification	GD/U General Use & Contract
Odour:	No Objectionable Odour
French VOC Emission Regs:	A+
Anti-Microbial & Mildew:	Pass
Impact Sound Reduction:	18 dB
Recyclable:	100%
Indoor Air Quality:	Green Label Plus Certified

STK900

interfloor



Specification

Sub Floor Usage:

Concrete/Plywood/Chipboard/Screed
Self-levelling/Hardboard

Bucket Size:

15. kg

Coverage:

Approx. 2-3 m² per kg

Storage:

12 months (between 5-30 degrees C)

Solvent Free:

Yes

Non Staining:

Yes

Water Based:

Yes

Suitability:

Carpets

Non plasticised vinyl floor

Non plasticised pvc

STK950

interfloor



Specification

Sub Floor Usage:

Concrete/Plywood/Chipboard/Screed
Self-levelling/Hardboard

Bucket Size:

15. kg

Coverage:

Approx. 4-9 m² per kg

Storage:

12 months (between 5-30 degrees C)

Solvent Free:

Yes

Low Odour:

Yes

Water Based:

Yes

Suitability:

Carpets
Carpet Tiles

STK100

interfloor



Specification

Sub Floor Usage:

Concrete/Plywood/Chipboard/Screed
Self-levelling/Hardboard

Bucket Size:

15. kg

Coverage:

Approx. 3-4 m² per kg

Storage:

12 months (between 5-30 degrees C)

Solvent Free:

Yes

Low Odour:

Yes

Water Based:

Yes

Suitability:

Vinyl Floor Coverings

Carpets with PVC, PU, Latex, Textile
& high density foam backings

FLOORING ACCESSORIES



Interfloor provides a vast range of underlay accessories to ensure a high-quality installation. The underlay accessories range includes: Carpet Grippers, Floor Edgings, Floor Adhesives, and Floor Tapes. All of the products are available upon request.



MODERN, CLASSICAL & STYLISH FLOOR, WALL & WINDOW TREATMENTS.

Inter Decor is a supply and fit out division based in the UAE with an extensive portfolio of floors, wall coverings and window treatment solutions. We offer extensive experience on a broad range of work from small bespoke fit-outs, through to substantial large-scale developments and masterplans

INTER DECOR

Renovation Furniture Trading LLC

T: +91 44533068 E: id@rftgulf.com.com

A: Opal Tower, Office No. 2004, Business Bay,
Burj Khalifa Boulevard, Dubai PO Box 103642.

W: www.interdecor.ae

