

B_

Aqua

A unique level cut loop broadloom that evokes the vast, calming spaces of the world’s seas. Inviting and soothing on the eye - ideal for the hospitality sector; refreshing and classy for executive areas. A wide colour palette that invites an equally vast choice of interior design options. Versatile and as variable as the sea in either wall-to-wall or loose-lay rug options.

Extended Specifications

Use Classification:	Medium/General Commercial - 32 (EN1307)
Construction:	Level Cut Loop (LCL)
Recycled Content:	Yarn – Stainproof SDX Eco (certain colours)
Yarn Type:	Stainproof SDX (Solution Dyed Nylon-6)
Yarn Mass:	± 900 (g/m²) ± 26,54 (oz/yd²) (ISO 8543)
Pile Height:	± 6.5 (mm) ± 0,26 (in) (ISO 8543)
Stitch Rate:	40 (per 10cm) 10,16 (per 1in)
Total Thickness:	± 9 (mm) ± 0,35 (in) (ISO 8543)
Total Mass:	± 1860 (g/m²) ± 54,86 (oz/yd²) (ISO 8543)
Standard Size (Broadloom):	4 (m) 157,48 (in)
Standard Backing:	FusionBac
Machine Gauge:	1/10”



B.

Aqua

Extended Specifications

Pattern repeat (l x w):	± 96 × 98.5 cm	
Fire Classification:	(SANS 10177-4) (EN 13501) (ISO 9239) (ASTM E 648-08)	
Colour Fastness to:	Light	> 6 (NF EN ISO 105-B02)
	Water	4 – 5 (ISO 105-E01)
	Dry Rubbing	4 – 5 (ISO 105-X12)
	Wet Rubbing	4 – 5 (ISO 105-X12)
Electrostatic Propensity:	≤ 2 kV (EN 14041) / (ISO 6356)	
Sound Absorption:	0,25 aw (EN ISO 354)	
Sound Insulation:	27 dB (EN ISO 10140)	
Thermal Resistance:	0,1201 m².K/W (ISO 8302)	
VOC Tested:	(ASTM D5116)	
Castor Chair Suitability:	(NF EN 985)	
Staircase Suitability:	(EN 1963) / (NF EN ISO 12951)	
Warranty:	15 year	
Guarantee:	5 year	




B.




Arabian Sea
L: 34,84 • Y: 8,42



Baltic Sea
L: 12,05 • Y: 1,41

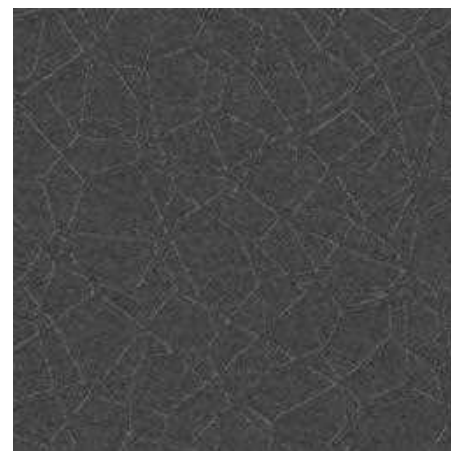

Celtic Sea
L: 34,62 • Y: 8,31

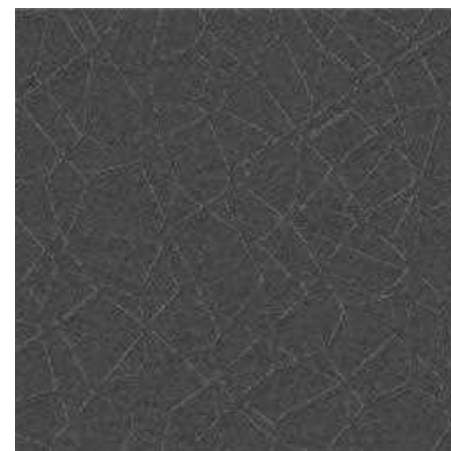

Hudson Bay
L: 33,48 • Y: 7,76



Mediterranean
L: 41,71 • Y: 12,32



Mozambique Channel
L: 46,78 • Y: 15,85




Persian Gulf
L: 55,84 • Y: 23,75



Solomon Sea
L: 47,86 • Y: 16,69



Sulu Sea
L: 49,32 • Y: 17,86

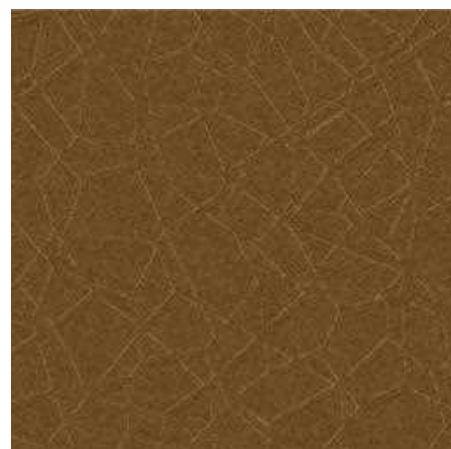

Timor Sea
L: 42,95 • Y: 13,12



Yellow Sea
L: 46,84 • Y: 15,89

Aqua



Medium/General
Commercial



From Local &
Imported Goods



Hospitality



Broadloom



Eco-Friendly



Underfloor
Heating



trust brands™



BELGOTEX GUARANTEE
5
YEAR



LIMITED WEAR WARRANTY
15
YEAR



Suitable for
Staircases



Office Chair
Castor Wheels



REUSE
REDUCE
RECYCLE



COLOURFAST
SDX
BLEACH RESISTANT



COLOURFAST
SDX
ECO
BLEACH RESISTANT



FUSION
BAC



ANTI ALLERGENIC



bsi
ISO 9001
Quality
Management
Systems
CERTIFIED



bsi
ISO 14001
Environmental
Management
CERTIFIED



ISO 45001
Occupational
Health and Safety
Management
CERTIFIED



GREEN BUILDING COUNCIL SA
MEMBER ORGANISATION

Bill of Quantities

- Belgotex's AQUA 4m wide Medium/General Commercial ±9mm FusionBac broadloom is manufactured from Stainproof SDX and Stainproof SDX Eco.
- This product is to be laid in accordance with the SANS 10186 fitting code of practice.
- Belgotex recommends the use of Carpet protector mats where castor wheels are used.
- 15 year warranty and 5 year guarantee.
- Made in South Africa.
- Green tag level A Gold rated certification.

*All product names and logos are trademarks of BELGOTEX FLOORCOVERINGS® (Pty) Ltd. © BELGOTEX FLOORCOVERINGS® (Pty) Ltd. All rights reserved. Warranty and guarantee to limitations and conditions. For details contact BELGOTEX FLOORCOVERINGS® (Pty) Ltd.

B.

Relic

Textured Collection: Broadloom & Rug

An explorer stumbles upon a long-lost treasure. It reminds us that the value of things we cherish today, is a consequence of the past. The value is not in the thing itself, but in its capacity to open up our imaginations to rethink what is important and that we too are leaving relics for the future. What will those be?

Extended Specifications

Use Classification:	Medium / General Commercial – 32 (EN 1307)
Construction:	Level Cut Loop (LCL)
Recycled Content:	Yarn – Stainproof SDX Eco (certain colours)
Yarn Type:	Stainproof SDX (Solution Dyed Nylon - 6)
Yarn Mass:	± 900 (g/m²) ± 26,54 (oz/yd²) (ISO 8543)
Pile Height:	± 6.5 (mm) ± 0,26 (in) (ISO 8543)
Stitch Rate:	40 (per 10cm) 10,16 (per 1in)
Total Thickness:	± 9 (mm) ± 0,35 (in) (ISO 8543)
Total Mass:	± 1860 (g/m²) ± 54,86 (oz/yd²) (ISO 8543)
Standard Size (Broadloom):	4 (m) 157,48 (in)
Standard Backing:	FusionBac



B.

Relic

Textured Collection: Broadloom & Rug

Extended Specifications

Machine Gauge:	1/10”
Pattern Repeat (lxw):	± 95 × 77 cm
Fire Classification:	3 (SANS 10177-4) Cfl-s1 (EN 13501) (ISO 9239) Class 1 (ASTM E 648-08)
Colour Fastness To:	Light > 6 (NF EN ISO 105-B02) Water 4 – 5 (ISO 105-E01) Dry Rubbing 4 – 5 (ISO 105-X12) Wet Rubbing 4 – 5 (ISO 105-X12)
Electrostatic Propensity:	≤ 2 kV (EN 14041) / (ISO 6356)
Sound Absorption:	0,25 aw (EN ISO 354)
Sound Insulation:	27 dB (EN ISO 10140)
Thermal Resistance:	0,1201 m².K/W (ISO 8302)
VOC Tested:	(ASTM D5116)
Castor Chair Suitability:	(NF EN 985)
Staircase Suitability:	(EN 1963) / (NF EN ISO 12951)
Warranty:	15 Year (Broadloom) 1 Year (Rug)
Guarantee:	5 Year (Broadloom) 1 Year (Rug)



B.



Bronze



Charcoal



Dove



Earthy



Metal



Mustard



Silver

Relic

Textured Collection: Broadloom & Rug

Hospitality

Medium/General Commercial

Underfloor Heating

Broadloom

Eco-Friendly

Suitable for Staircases
(Broadloom)

Office Chair Castor Wheels

Rugs

GREEN TAG CERTIFIED
trust brands™

FUSION BAC

LIMITED WEAR WARRANTY
15 YEAR
(Broadloom)

BELGOTEX GUARANTEE
5 YEAR
(Broadloom)

RESIDENTIAL WARRANTY
1 YEAR
(Rug)

BELGOTEX GUARANTEE
1 YEAR
(Rug)

REUSE
REDUCE
RECYCLE

ANTI ALLERGENIC

COLOURFAST
SDX
BLEACH RESISTANT

COLOURFAST
SDX ECO
BLEACH RESISTANT

MADE IN SOUTH AFRICA
From Local & Imported Goods

bsi ISO 9001
Quality Management Systems
CERTIFIED

bsi ISO 14001
Environmental Management
CERTIFIED

bsi ISO 45001
Occupational Health and Safety Management
CERTIFIED

GREEN BUILDING COUNCIL
MEMBER ORGANISATION

Bill of Quantities

- Belgotex’s TEXTURED collection is available as 1.6 × 2.4m/2 × 3m/2.4 × 3.4m/3 × 4m/0.8 × 3m rugs and as 4m wide General/Medium Commercial ±9mm (total thickness) FusionBac broadloom, manufactured from Stainproof SDX and Stainproof SDX ECO.
- This product is to be laid in accordance with the SANS 10186 fitting code of practice.
- Belgotex recommends the use of carpet protector mats where castor wheels are used.
- 15 year warranty and 5 year guarantee for broadloom.
- 1 year warranty and 1 year guarantee for rugs.
- Made in South Africa.
- GreenTag Level A Gold Rated Certification.

*All product names and logos are trademarks of BELGOTEX FLOORCOVERINGS® (Pty) Ltd. © BELGOTEX FLOORCOVERINGS® (Pty) Ltd. All rights reserved. Warranty and guarantee to limitations and conditions. For details contact BELGOTEX FLOORCOVERINGS® (Pty) Ltd.

B_

City Life

The Destination Collection

Like the traveller whose eyes rest upon the exciting shimmer of city lights in the distance, this carpet lets you know you have arrived! Inspired by the cosmopolitan energy, fast-pace and stamina of urban life, it offers a vibrant colour palette, a pattern designed for obscuring heavy foot traffic, and enhanced durability using our Stainproof SDX fibres. From hotel suite to office, this heavy tufted broadloom offers in-vogue sophistication that is sure to be as memorable as any of the world’s greatest cities.

Extended Specifications

Use Classification:	Heavy Commercial
Construction:	Woven
Product Description:	SDX Woven Carpet
Recycled Content:	Yarn – Stainproof SDX Eco (certain colours)
Yarn Type:	Stainproof SDX (Solution Dyed Nylon)
Yarn Mass:	± 1012 (g/m²) ± 29,84 (oz/yd²)
Pile Height:	± 6.1 (mm) ± 0,24 (in)
Total Thickness:	± 8.4 (mm) ± 0,33 (in)
Surface Pile Density:	±0.159 g/cm³
Total Mass:	± 1832 (g/m²) ± 54,03 (oz/yd²)
Standard Width (BL):	4 (m) 157,48 (in)
Standard Backing:	Axi Backing (Polyester, Polypropylene, SBR Latex)



B.

City Life

The Destination Collection

Extended Specifications


Machine Gauge:	Rows: 36 Pitch: 27.8
Pattern repeat (l x w):	100.15cm x 157.48cm
Fire Classification:	Cfl-S1 (EN 13501-1) Class 1 (ASTM E648) Class 2 (Corelated Rating to EN13501) (SANS 10117-4)
Colour Fastness to	: Light > 6 (NF EN ISO 105-BO2) : Water 5 (ISO 105 EO1) : Dry Rubbing 5 (ISO 105-X12)
Electrostatic Propensity:	-0.3 (kV) (ISO 6356)
Thermal Resistance:	0.1011 (m² k/W) (R) (ISO 8302)
Sound Absorption:	aw 0.20 (H) (EN ISO 354)
Sound Insulation:	29 dB (EN ISO 10140-3)
VOC Tested:	Passed (ASTM D5116 CRI - GBCSA/GBCA)
Castor Chair Suitability:	A : Intensive Use (NF EN 985)
Staircase Suitability:	Intensive Use (NF EN ISO 12951)
Warranty:	5-Year Manufactures Warranty
Guarantee:	5-Year Manufactures Guarantee



B.



Venice
L: 57.98 • Y: 25.94

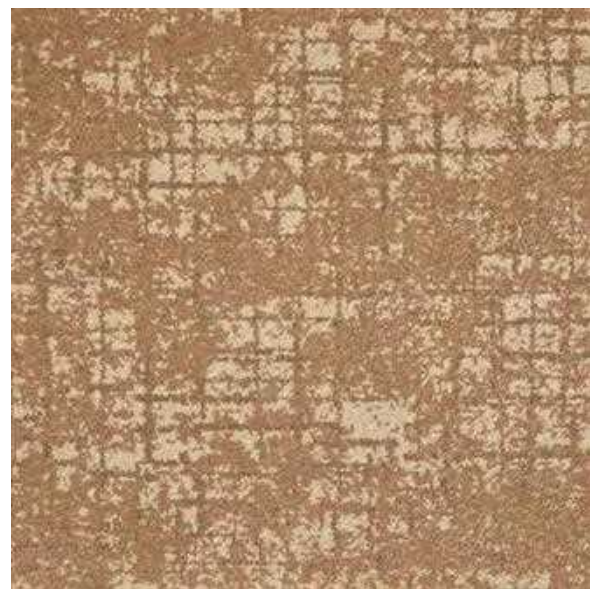

Sydney
L: 41.42 • Y: 12.13



Paris
L: 38.29 • Y: 10.25



Moscow
L: 31.75 • Y: 6.97



Florence
L: 25.87 • Y: 4.70

City Life

The Destination Collection



Heavy
Commercial



Commercial



Hospitality



Institution




Broadloom



Eco-Friendly



Underfloor
Heating



Rugs
(On Request)



Bill of Quantities

- Belgotex's CITY LIFE 4m wide Heavy Commercial $\pm 8.4\text{mm}$ (total thickness) Axi Bac broadloom is manufactured from Stainproof SDX and Stainproof SDX Eco.
- This product is to be laid in accordance with the SANS 10186 fitting code of practice.
- Belgotex recommends the use of Carpet protector mats where castor wheels are used.
- 5 year warranty and 5 year guarantee.
- Made in South Africa.

*All product names and logos are trademarks of BELGOTEX FLOORCOVERINGS® (Pty) Ltd. © BELGOTEX FLOORCOVERINGS® (Pty) Ltd. All rights reserved. Warranty and guarantee to limitations and conditions. For details contact BELGOTEX FLOORCOVERINGS® (Pty) Ltd.

B.

Tulle

Textured Collection: Broadloom & Rug

On its own a thread has little strength, but when woven with others new potential emerges. The transformation of a single thread into a new material with its own properties reminds us to seek people with whom we can work to unlock new and unexpected possibilities within ourselves, and others.

Extended Specifications

Use Classification:	Medium / General Commercial – 32 (EN 1307)
Construction:	Level Cut Loop (LCL)
Recycled Content:	Yarn – Stainproof SDX Eco (certain colours)
Yarn Type:	Stainproof SDX (Solution Dyed Nylon - 6)
Yarn Mass:	± 900 (g/m²) ± 26,54 (oz/yd²) (ISO 8543)
Pile Height:	± 6.5 (mm) ± 0,26 (in) (ISO 8543)
Stitch Rate:	40 (per 10cm) 10,16 (per 1in)
Total Thickness:	± 9 (mm) ± 0,35 (in) (ISO 8543)
Total Mass:	± 1860 (g/m²) ± 54,86 (oz/yd²) (ISO 8543)
Standard Size (Broadloom):	4 (m) 157,48 (in)
Standard Backing:	FusionBac



B.

Tulle

Textured Collection: Broadloom & Rug

Extended Specifications


Machine Gauge:	1/10"
Pattern Repeat (lxw):	± 68 × 67 cm
Fire Classification:	3 (SANS 10177-4) Cfl-s1 (EN 13501-1) (ISO 9239) Class 1 (ASTM E 648-08)
Colour Fastness To:	Light > 6 (NF EN ISO 105-B02) Water 4 – 5 (ISO 105-E01) Dry Rubbing 4 – 5 (ISO 105-X12) Wet Rubbing 4 – 5 (ISO 105-X12)
Electrostatic Propensity:	≤ 2 kV (EN 14041) / (ISO 6356)
Sound Absorption:	0,25 aw (EN ISO 354)
Sound Insulation:	27 dB (EN ISO 10140)
Thermal Resistance:	0,1201 m².K/W (ISO 8302)
VOC Tested:	(ASTM D5116)
Castor Chair Suitability:	(NF EN 985)
Staircase Suitability:	(EN 1963) / (NF EN ISO 12951)
Warranty:	15 Year (Broadloom) 1 Year (Rug)
Guarantee:	5 Year (Broadloom) 1 Year (Rug)



B.



Bronze

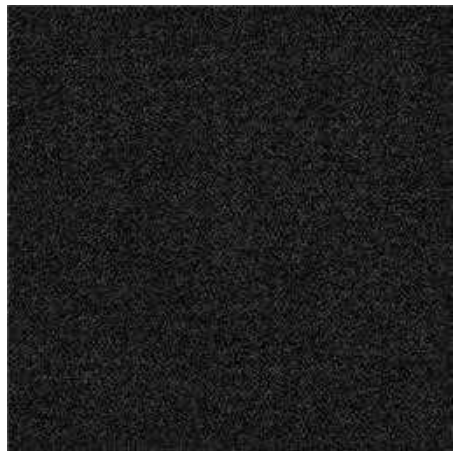

Charcoal



Dove




Earthy



Metal



Mustard

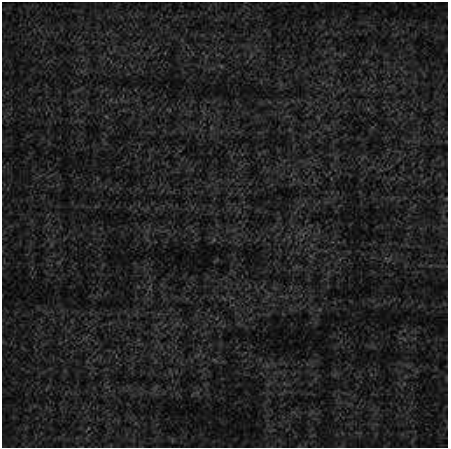

Silver

Tulle

Textured Collection: Broadloom & Rug

Hospitality

Medium/General Commercial

Underfloor Heating

Broadloom

Eco-Friendly

Suitable for Staircases (Broadloom)

Office Chair Castor Wheels

Rugs

GREEN TAG CERTIFIED

FUSION BAC

15 YEAR LIMITED WEAR WARRANTY (Broadloom)

5 YEAR BELGOTEX GUARANTEE (Broadloom)

1 YEAR RESIDENTIAL WARRANTY (Rug)

1 YEAR BELGOTEX GUARANTEE (Rug)

REUSE
REDUCE
RECYCLE

ANTI ALLERGENIC

SDX COLOURFAST BLEACH RESISTANT

SDX ECO COLOURFAST BLEACH RESISTANT

MADE IN SOUTH AFRICA
From Local & Imported Goods

bsi ISO 9001 Quality Management Systems CERTIFIED

bsi ISO 14001 Environmental Management CERTIFIED

bsi ISO 45001 Occupational Health and Safety Management CERTIFIED

GREEN BUILDING COUNCIL
MEMBER ORGANISATION

Bill of Quantities

- Belgotex’s TEXTURED collection is available as 1.6 × 2.4m/2 × 3m/2.4 × 3.4m/3 × 4m/0.8 × 3m rugs and as 4m wide General/Medium Commercial ±9mm (total thickness) FusionBac broadloom, manufactured from Stainproof SDX and Stainproof SDX ECO.
- This product is to be laid in accordance with the SANS 10186 fitting code of practice.
- Belgotex recommends the use of carpet protector mats where castor wheels are used.
- 15 year warranty and 5 year guarantee for broadloom.
- 1 year warranty and 1 year guarantee for rugs.
- Made in South Africa.
- GreenTag Level A Gold Rated Certification.

*All product names and logos are trademarks of BELGOTEX FLOORCOVERINGS® (Pty) Ltd. © BELGOTEX FLOORCOVERINGS® (Pty) Ltd. All rights reserved. Warranty and guarantee to limitations and conditions. For details contact BELGOTEX FLOORCOVERINGS® (Pty) Ltd.

B.

Scales

Textured Collection: Broadloom & Rug

While you cannot predict what the future holds, you can take action within your means to tip the scales in your favour. Cultivate conditions in your life that make it easier to realise your goals. Then, to increase your chances of achieving them, turn them into habits!

Extended Specifications

Use Classification:	Medium / General Commercial – 32 (EN 1307)
Construction:	Level Cut Loop (LCL)
Recycled Content:	Yarn – Stainproof SDX Eco (certain colours)
Yarn Type:	Stainproof SDX (Solution Dyed Nylon - 6)
Yarn Mass:	± 900 (g/m²) ± 26,54 (oz/yd²) (ISO 8543)
Pile Height:	± 6.5 (mm) ± 0,26 (in) (ISO 8543)
Stitch Rate:	40 (per 10cm) 10,16 (per 1in)
Total Thickness:	± 9 (mm) ± 0,35 (in) (ISO 8543)
Total Mass:	± 1860 (g/m²) ± 54,86 (oz/yd²) (ISO 8543)
Standard Size (Broadloom):	4 (m) 157,48 (in)
Standard Backing:	FusionBac



B.

Scales

Textured Collection: Broadloom & Rug

Extended Specifications

Machine Gauge:	1/10"
Pattern Repeat (l x w):	± 240 × 122 cm
Fire Classification:	3 (SANS 10177-4) Cfl-s1 (EN 13501-1) (ISO 9239) Class 1 (ASTM E 648-08)
Colour Fastness To:	Light > 6 (NF EN ISO 105-B02) Water 4 – 5 (ISO 105-E01) Dry Rubbing 4 – 5 (ISO 105-X12) Wet Rubbing 4 – 5 (ISO 105-X12)
Electrostatic Propensity:	≤ 2 kV (EN 14041) / (ISO 6356)
Sound Absorption:	0,25 aw (EN ISO 354)
Sound Insulation:	27 dB (EN ISO 10140)
Thermal Resistance:	0,1201 m².K/W (ISO 8302)
VOC Tested:	(ASTM D5116)
Castor Chair Suitability:	(NF EN 985)
Staircase Suitability:	(EN 1963) / (NF EN ISO 12951)
Warranty:	15 Year (Broadloom) 1 Year (Rug)
Guarantee:	5 Year (Broadloom) 1 Year (Rug)



B.



Bronze



Charcoal



Dove



Earthy



Metal



Mustard



Silver

Scales

Textured Collection: Broadloom & Rug



Bill of Quantities

- Belgotex's TEXTURED collection is available as 1.6 × 2.4m/2 × 3m/2.4 × 3.4m/3 × 4m/0.8 × 3m rugs and as 4m wide General/Medium Commercial ±9mm (total thickness) FusionBac broadloom, manufactured from Stainproof SDX and Stainproof SDX ECO.
- This product is to be laid in accordance with the SANS 10186 fitting code of practice.
- Belgotex recommends the use of carpet protector mats where castor wheels are used.
- 15 year warranty and 5 year guarantee for broadloom.
- 1 year warranty and 1 year guarantee for rugs.
- Made in South Africa.
- GreenTag Level A Gold Rated Certification.

*All product names and logos are trademarks of BELGOTEX FLOORCOVERINGS® (Pty) Ltd. © BELGOTEX FLOORCOVERINGS® (Pty) Ltd. All rights reserved. Warranty and guarantee to limitations and conditions. For details contact BELGOTEX FLOORCOVERINGS® (Pty) Ltd.

B. Swirl

Textured Collection: Broadloom & Rug

Let go. Move. Have fun. Life is always in motion, so don't let current circumstances hold you back and don't let conventions restrict you from expanding yourself. Your unique creative energy is waiting to be released, so tap into it and let it swirl!

Extended Specifications

Use Classification:	Medium / General Commercial – 32 (EN 1307)
Construction:	Level Cut Loop (LCL)
Recycled Content:	Yarn – Stainproof SDX Eco (certain colours)
Yarn Type:	Stainproof SDX (Solution Dyed Nylon - 6)
Yarn Mass:	± 900 (g/m²) ± 26,54 (oz/yd²) (ISO 8543)
Pile Height:	± 6.5 (mm) ± 0,26 (in) (ISO 8543)
Stitch Rate:	40 (per 10cm) 10,16 (per 1in)
Total Thickness:	± 9 (mm) ± 0,35 (in) (ISO 8543)
Total Mass:	± 1860 (g/m²) ± 54,86 (oz/yd²) (ISO 8543)
Standard Size (Broadloom):	4 (m) 157,48 (in)
Standard Backing:	FusionBac



B.

Swirl


Textured Collection: Broadloom & Rug

Extended Specifications

Machine Gauge:	1/10"
Pattern Repeat (lxw):	± 194 × 132.5 cm
Fire Classification:	3 (SANS 10177-4) Cfl-s1 (EN 13501-1) (ISO 9239) Class 1 (ASTM E 648-08)
Colour Fastness To:	Light > 6 (NF EN ISO 105-B02) Water 4 – 5 (ISO 105-E01) Dry Rubbing 4 – 5 (ISO 105-X12) Wet Rubbing 4 – 5 (ISO 105-X12)
Electrostatic Propensity:	≤ 2 kV (EN 14041) / (ISO 6356)
Sound Absorption:	0,25 aw (EN ISO 354)
Sound Insulation:	27 dB (EN ISO 10140)
Thermal Resistance:	0,1201 m².K/W (ISO 8302)
VOC Tested:	(ASTM D5116)
Castor Chair Suitability:	(NF EN 985)
Staircase Suitability:	(EN 1963) / (NF EN ISO 12951)
Warranty:	15 Year (Broadloom) 1 Year (Rug)
Guarantee:	5 Year (Broadloom) 1 Year (Rug)



B.

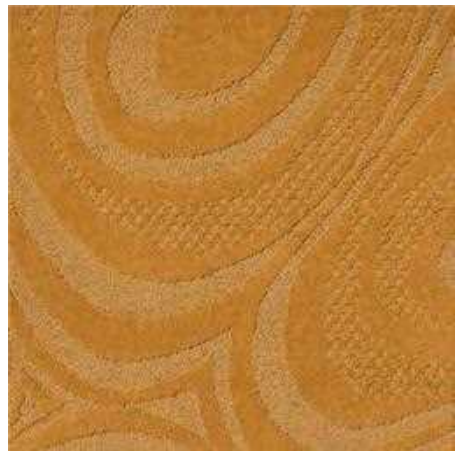

Bronze



Charcoal



Dove



Earthy



Metal



Mustard



Silver

Swirl

Textured Collection: Broadloom & Rug



Hospitality



Medium/General Commercial



Underfloor Heating



Broadloom



Eco-Friendly



Suitable for Staircases (Broadloom)



Office Chair Castor Wheels



Rugs



Green Tag Certified



Fusion BAC



15 Year Limited Wear Warranty (Broadloom)



5 Year Belgotex Guarantee (Broadloom)



1 Year Residential Warranty (Rug)



1 Year Belgotex Guarantee (Rug)



REUSE
REDUCE
RECYCLE



ANTI ALLERGENIC



SDX
COLOURFAST
BLEACH RESISTANT



SDX ECO
COLOURFAST
BLEACH RESISTANT



MADE IN SOUTH AFRICA
From Local & Imported Goods



bsi ISO 9001
Quality Management Systems
CERTIFIED



bsi ISO 14001
Environmental Management
CERTIFIED



bsi ISO 45001
Occupational Health and Safety Management
CERTIFIED



GREEN BUILDING COUNCIL
MEMBER ORGANISATION

Bill of Quantities

- Belgotex’s TEXTURED collection is available as 1.6 × 2.4m/2 × 3m/2.4 × 3.4m/3 × 4m/0.8 × 3m rugs and as 4m wide General/Medium Commercial ±9mm (total thickness) FusionBac broadloom, manufactured from Stainproof SDX and Stainproof SDX ECO.
- This product is to be laid in accordance with the SANS 10186 fitting code of practice.
- Belgotex recommends the use of carpet protector mats where castor wheels are used.
- 15 year warranty and 5 year guarantee for broadloom.
- 1 year warranty and 1 year guarantee for rugs.
- Made in South Africa.
- GreenTag Level A Gold Rated Certification.

*All product names and logos are trademarks of BELGOTEX FLOORCOVERINGS® (Pty) Ltd. © BELGOTEX FLOORCOVERINGS® (Pty) Ltd. All rights reserved. Warranty and guarantee to limitations and conditions. For details contact BELGOTEX FLOORCOVERINGS® (Pty) Ltd.

B.


Rustic Grain

The Destination Collection

Few things can be more charming than a relaxing walk through the unspoilt countryside. Its soothing palette of earthy colours and rugged textures leave us vibrantly energised. This feeling has been the motivation behind creating this high-performance Stainproof SDX woven carpet range, ideal for heavy commercial applications. By combining the most comforting aesthetics nature has to offer with the latest manufacturing solutions that include innovative Axi Backing, we have created our most down to earth carpet range yet, Rustic Grain.

Extended Specifications

Use Classification:	Heavy Commercial
Construction:	Woven
Product Description:	SDX Woven Carpet
Recycled Content:	Yarn – Stainproof SDX Eco (certain colours)
Yarn Type:	Stainproof SDX (Solution Dyed Nylon)
Yarn Mass:	± 1012 (g/m ²) ± 29,84 (oz/yd ²)
Pile Height:	± 6.1 (mm) ± 0,24 (in)
Total Thickness:	± 8.4 (mm) ± 0,33 (in)
Surface Pile Density:	±0.159 g/cm ³
Total Mass:	± 1832 (g/m ²) ± 54,03 (oz/yd ²)
Standard Width (BL):	4 (m) 157,48 (in)
Standard Backing:	Axi Backing (Polyester, Polypropylene, SBR Latex)

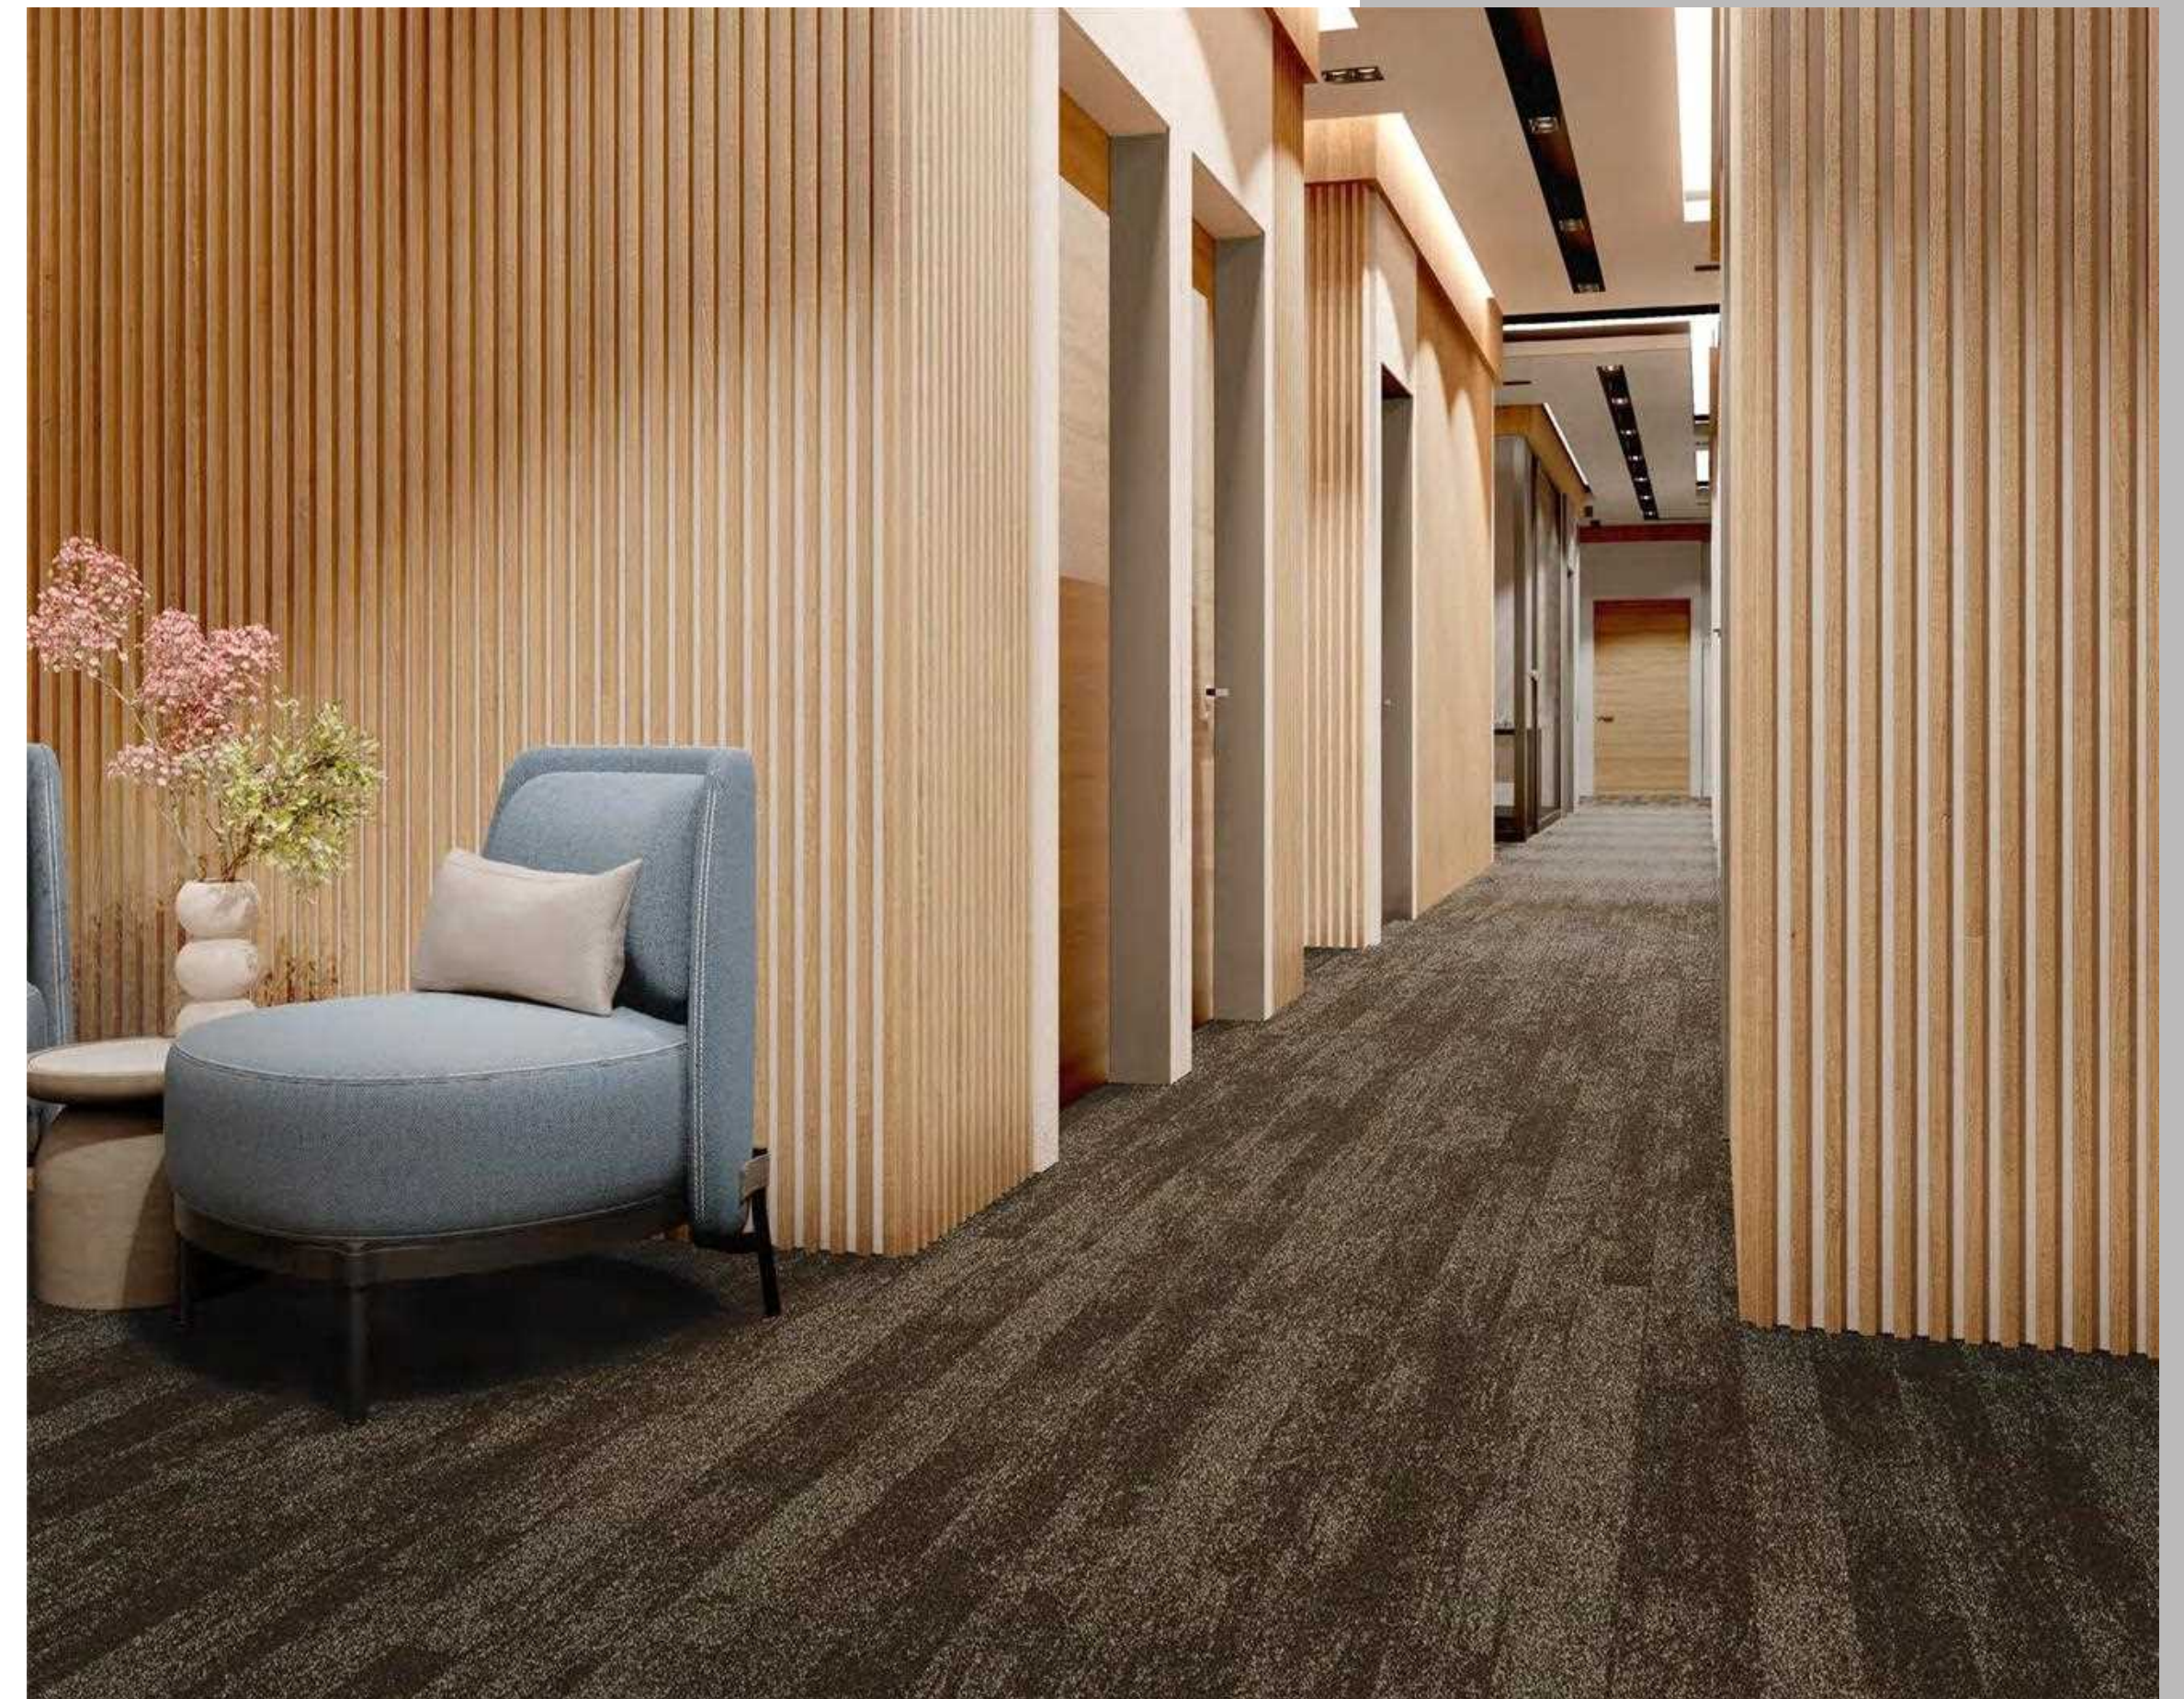

B.

Rustic Grain


The Destination Collection

Extended Specifications

Machine Gauge:	Rows: 36 Pitch: 27.8
Pattern repeat (l x w):	203.20cm x 133.53cm
Fire Classification:	Cfl S1 (EN 13501) Class 1 (ASTM E 648) Class 2 (Correlated Rating to EN13501) (SANS 10117-4)
Colour Fastness to	: Light > 6 (ISO 105-BO2) : Water 5 (ISO 105-EO1) : Dry Rubbing 5 (ISO 105-X12)
Electrostatic Propensity:	-0.3 (kV) (ISO 6356)
Thermal Resistance:	0.1011 (m² k/W) (R) (ISO 8302)
Sound Absorption:	aw 0.20 (H) (EN ISO 354)
Sound Insulation:	29 dB (EN ISO 10140 -3)
VOC Tested:	Passed (ASTM D5116 CRI - GBCSA/GBCA)
Castor Chair Suitability:	A : Intensive Use (NF EN 985)
Staircase Suitability:	Intensive Use (NF EN ISO 12951)
Warranty:	5-Year Manufactures Warranty
Guarantee:	5-Year Manufactures Guarantee



B.

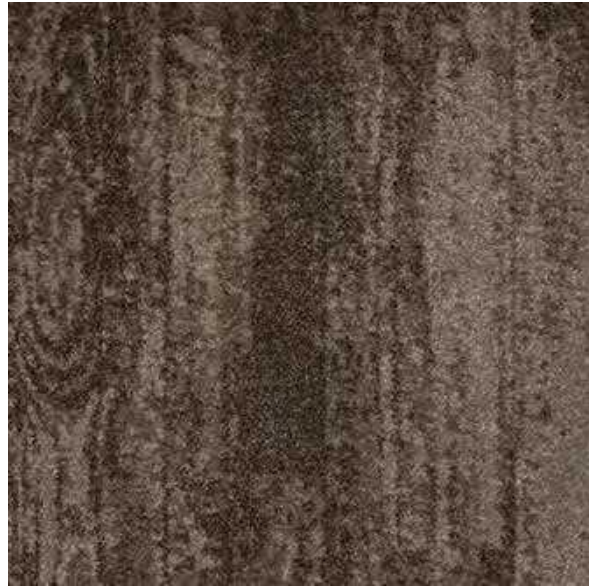

Fancy Grove
L: 26.66 • Y: 4.97



Glorious Wilds
L: 30.33 • Y: 6.37



Mighty Mead
L: 39.37 • Y: 10.88



Timberland
L: 56.38 • Y: 24.30



Ancient Beech
L: 28.57 • Y: 5.67

Rustic Grain

The Destination Collection



Bill of Quantities

- Belgotex's RUSTIC GRAIN 4m wide Heavy Commercial $\pm 8.4\text{mm}$ (total thickness) Axi Bac broadloom is manufactured from Stainproof SDX and Stainproof SDX Eco.
- This product is to be laid in accordance with the SANS 10186 fitting code of practice.
- Belgotex recommends the use of Carpet protector mats where castor wheels are used.
- 5 year warranty and 5 year guarantee.
- Made in South Africa.

*All product names and logos are trademarks of BELGOTEX FLOORCOVERINGS® (Pty) Ltd. © BELGOTEX FLOORCOVERINGS® (Pty) Ltd. All rights reserved. Warranty and guarantee to limitations and conditions. For details contact BELGOTEX FLOORCOVERINGS® (Pty) Ltd.